
Ansible Tower Administration Guide

Release Ansible Tower 3.1.4

Red Hat, Inc.

Jul 12, 2017

CONTENTS

1	Tower Licensing, Updates, and Support	2
1.1	Support	2
1.2	Trial / Evaluation	3
1.3	Subscription Types	3
1.4	Node Counting in Licenses	3
1.5	License Features	4
1.6	Tower Component Licenses	4
2	Starting, Stopping, and Restarting Tower	5
3	Custom Inventory Scripts	6
3.1	Writing Inventory Scripts	8
4	Management Jobs	9
4.1	Removing Old Activity Stream Data	9
4.2	Removing Old Fact (System Tracking) Data	13
4.3	Removing Old Job History	16
5	Clustering	21
5.1	Setup Considerations	21
5.2	Install and Configure	22
5.3	Status and Monitoring via Browser API	23
5.4	Node Services and Failure Behavior	23
5.5	Job Runtime Behavior	24
5.6	Deprovision Nodes	25
6	Proxy Support	26
6.1	Configure Known Proxies	27
6.2	Reverse Proxy	27
7	Tower Logfiles	28
8	Tower Logging and Aggregation	29
8.1	Logging Aggregator Services	29
8.2	Set Up Logging with Tower	31
8.3	SSL Certificate Verification	32
9	The <i>tower-manage</i> Utility	33
9.1	Inventory Import	33
9.2	Cleanup of old data	33
9.3	HA management	34

10 Tower Configuration	35
10.1 Authentication	35
10.2 Jobs	36
10.3 System	37
10.4 User Interface	38
11 Bubblewrap functionality and variables	39
12 Setting up Social Authentication	40
12.1 Google OAuth2 Settings	40
12.2 GitHub OAuth2 Settings	42
12.3 Organization and Team Mapping	46
13 Setting up Enterprise Authentication	49
13.1 Azure Active Directory (AD)	49
13.2 SAML Authentication Settings	51
13.3 RADIUS Authentication Settings	56
14 Setting up LDAP Authentication	58
14.1 Referrals	62
14.2 Enabling Logging for LDAP	63
14.3 LDAP Organization and Team Mapping	63
15 Changing the Default Timeout for Authentication	65
16 User Authentication with Kerberos	67
16.1 AD and Kerberos Credentials	68
16.2 Working with Kerberos Tickets	69
17 Working with Session Limits	70
18 Backing Up and Restoring Tower	71
18.1 Backup/Restore Playbooks	71
18.2 Backup and Restoration Considerations	72
19 Using Custom Logos in Ansible Tower	73
20 Troubleshooting Tower	75
20.1 Error logs	75
20.2 Problems connecting to your host	75
20.3 WebSockets port for live events not working	75
20.4 Problems running a playbook	75
20.5 Problems when running a job	76
20.6 Playbooks aren't showing up in the "Job Template" drop-down	76
20.7 Playbook stays in pending	76
20.8 Cancel a Tower job	76
20.9 Reusing an external HA database causes installations to fail	76
20.10 Private EC2 VPC Instances in Tower Inventory	77
20.11 Troubleshooting "Error: provided hosts list is empty"	78
21 Tower Tips and Tricks	79
21.1 Using the Tower CLI Tool	79
21.2 Launching a Job Template via the API	79
21.3 tower-cli Job Template Launching	81
21.4 Changing the Tower Admin Password	81
21.5 Creating a Tower Admin from the commandline	81

21.6	Setting up a jump host to use with Tower	82
21.7	View Ansible outputs for JSON commands when using Tower	82
21.8	Locate and configure the Ansible configuration file	82
21.9	View a listing of all ansible_ variables	82
21.10	Using virtualenv with Ansible Tower	83
21.11	Configuring the towerhost hostname for notifications	83
21.12	Launching Jobs with curl	83
21.13	Dynamic Inventory and private IP addresses	84
21.14	Filtering instances returned by the dynamic inventory sources in Tower	84
21.15	Using an unreleased module from Ansible source with Tower	85
21.16	Using callback plugins with Tower	85
21.17	Connecting to Windows with winrm	85
21.18	Importing existing inventory files and host/group vars into Tower	86
22	Introduction to tower-cli	87
22.1	License	87
22.2	Capabilities	87
22.3	Installation	87
22.4	Configuration	88
23	Usability Analytics and Data Collection	92
24	Postface	93
25	Index	96
26	Copyright © 2017 Red Hat, Inc.	97
	Index	98

Thank you for your interest in Ansible Tower by Red Hat. Ansible Tower is a commercial offering that helps teams manage complex multi-tier deployments by adding control, knowledge, and delegation to Ansible-powered environments.

The *Ansible Tower Administration Guide* documents the administration of Ansible Tower through custom scripts, management jobs, and more. Written for DevOps engineers and administrators, the *Ansible Tower Administration Guide* assumes a basic understanding of the systems requiring management with Tower's easy-to-use graphical interface. This document has been updated to include information for the latest release of Ansible Tower 3.1.4.

Ansible Tower Version 3.1.4; July 10, 2017; <https://access.redhat.com/>

TOWER LICENSING, UPDATES, AND SUPPORT

Ansible Tower by Red Hat (“**Ansible Tower**”) is a proprietary software product provided via an annual subscription entered into between you and Red Hat, Inc. (“**Red Hat**”).

Ansible is an open source software project and is licensed under the GNU General Public License version 3, as detailed in the Ansible source code: <https://github.com/ansible/ansible/blob/devel/COPYING>

1.1 Support

Red Hat offers support for paid **Enterprise: Standard** and **Enterprise: Premium** Subscription customers seeking help with the Ansible Tower product.

If you or your company has paid for Ansible Tower, you can contact the support team at <https://access.redhat.com>. To better understand the levels of support which match your Ansible Tower Subscription, refer to *Subscription Types*.

If you are experiencing Ansible software issues, you should reach out to the “ansible-devel” mailing list or file an issue on the Github project page at <https://github.com/ansible/ansible/issues/>.

All of Ansible’s community and OSS info can be found here: <https://docs.ansible.com/ansible/community.html>

1.1.1 Ansible Playbook Support

For customers with a paid Enterprise: Standard or Enterprise: Premium Ansible Tower Subscription, Red Hat offers Ansible Playbook support¹. Playbook support consists of support for:

- Runtime execution problems for Playbooks run via Tower
- Assistance with Playbook errors and tracebacks
- Limited best practice guidance in Ansible use from the Ansible Experts

Playbook support does not consist of:

- Enhancements and fixes for Ansible modules and the Ansible engine
- Assistance with the creation of Playbooks from anew
- Long-term maintenance of a specific Ansible or Ansible Tower version

¹ Playbook support is available for customers using the current or previous minor release of Ansible. For example, if the current version of Ansible is 2.2, Red Hat provides Ansible Playbook support for versions 2.2 and 2.1. In the event an Ansible Playbook workaround is not available, and an Ansible software correction is required, a version update will be required.

Notes:

1.2 Trial / Evaluation

While a license is required for Ansible Tower to run, there is no fee for managing up to 10 hosts. Additionally, trial licenses are available for exploring Ansible Tower with a larger number of hosts.

- Trial licenses for Ansible Tower are available at: <http://ansible.com/license>
- To acquire a license for additional Managed Nodes, visit: <http://www.ansible.com/pricing/>
- Ansible Playbook Support is not included in a trial license or during an evaluation of the Tower Software.

1.3 Subscription Types

Ansible Tower is provided at various levels of support and number of machines as an annual Subscription.

- **Self-Support**
 - Manage smaller environments (up to 250 Managed Nodes)
 - Maintenance and upgrades included
 - No support or SLA included
- **Enterprise: Standard (F.K.A. “Enterprise”)**
 - Manage any size environment
 - Enterprise 8x5 support and SLA
 - Maintenance and upgrades included
 - Review the SLA at: <https://access.redhat.com/support/offerings/production/sla>
 - Review the Red Hat Support Severity Level Definitions at: <https://access.redhat.com/support/policy/severity>
- **Enterprise: Premium (F.K.A. “Premium Enterprise”)**
 - Manage any size environment, including mission-critical environments
 - Premium 24x7 support and SLA
 - Maintenance and upgrades included
 - Review the SLA at: <https://access.redhat.com/support/offerings/production/sla>
 - Review the Red Hat Support Severity Level Definitions at: <https://access.redhat.com/support/policy/severity>

All Subscription levels include regular updates and releases of Ansible Tower.

For more information, contact Ansible via the Red Hat Customer portal at <https://access.redhat.com/> or at <http://www.ansible.com/pricing/>.

1.4 Node Counting in Licenses

The Tower license defines the number of Managed Nodes that can be managed by Ansible Tower. A typical license will say ‘License Count: 500’, which sets the maximum number of Managed Nodes at 500.

Ansible Tower counts Managed Nodes by the number of hosts in inventory. If more Managed Nodes are in the Ansible Tower inventory than are supported by the license, you will be unable to start any Jobs in Ansible Tower. If a dynamic inventory sync causes Ansible Tower to exceed the Managed Node count specified in the license, the dynamic inventory sync will fail.

If you have multiple hosts in inventory that have the same name, such as “webserver1”, they will be counted for licensing purposes as a single node. Note that this differs from the ‘Hosts’ count in Tower’s dashboard, which counts hosts in separate inventories separately.

1.5 License Features

The following list of features are available for all new Enterprise: Standard or Enterprise: Premium Subscriptions:

- Workflows (*added in latl 3.1.0*)
- Clustering in Tower (*added in latl 3.1.0*)
- Custom re-branding for login (*added in Ansible Tower 2.4.0*)
- SAML and RADIUS Authentication Support (*added in Ansible Tower 2.4.0*)
- Multi-Organization Support
- Activity Streams
- Surveys
- LDAP Support
- Active/Passive Redundancy
- System Tracking (*added in Ansible Tower 2.2.0*)

Enterprise: Standard or Enterprise: Premium license users with versions of Ansible Tower prior to 2.2 must import a new license file to enable System Tracking.

1.6 Tower Component Licenses

To view the license information for the components included within Ansible Tower, refer to `/usr/share/doc/ansible-tower-<version>/README` where `<version>` refers to the version of Ansible Tower you have installed.

To view a specific license, refer to `/usr/share/doc/ansible-tower-<version>/*.txt`, where `*` is replaced by the license file name to which you are referring.

STARTING, STOPPING, AND RESTARTING TOWER

Ansible Tower now ships with an *admin utility script*, `ansible-tower-service`, that can start, stop, and restart the full tower infrastructure (including the database and message queue components). The services script resides in `/usr/bin/ansible-tower-service` and can be invoked as follows:

```
root@localhost:~$ ansible-tower-service restart
```


You can also invoke it via distribution-specific service management commands. Distribution packages often provide a similar script, sometimes as an init script, to manage services. Refer to your distribution-specific service management system for more information.

Note: Beginning with version 2.2.0, Ansible Tower has moved away from using an init script in favor of using an admin utility script. Previous versions of Ansible Tower shipped with a standard `ansible-tower` init script that could be used to start, stop, and query the full Tower infrastructure. It was evoked via the service command: `/etc/init.d/ansible-tower` script. For those using a 2.2.0 or later version of Ansible Tower, the new admin utility script, `ansible-tower-service`, should be used instead.

CUSTOM INVENTORY SCRIPTS

Tower includes built-in support for syncing dynamic inventory from cloud sources such as Amazon AWS, Google Compute Engine, and Rackspace, among others. Tower also offers the ability to use a custom script to pull from your own inventory source.

Note: With the release of Ansible Tower 2.4.0, edits and additions to Inventory host variables now persist beyond an inventory sync as long as `--overwrite_vars` is **not** set. To have inventory syncs behave as they did before, it is now required that both `--overwrite` and `--overwrite_vars` are set.

To manage the custom inventory scripts available in Tower, choose **Inventory Scripts** from the Setup () menu.


[SETTINGS](#) / INVENTORY SCRIPTS



INVENTORY SCRIPTS 0

+ ADD

PLEASE ADD ITEMS TO THIS LIST

To add a new custom inventory script, click the  button.



NEW CUSTOM INVENTORY

* NAME

DESCRIPTION

* ORGANIZATION

* CUSTOM SCRIPT

CANCEL

SAVE

Enter the name for the script, plus an optional description. Then select the **Organization** that this script belongs to.

You can then either drag and drop a script on your local system into the **Custom Script** text box, or cut and paste the contents of the inventory script there.

TOWER

PROJECTS

INVENTORIES

JOB TEMPLATES

JOBS

admin

SETTINGS / INVENTORY SCRIPTS / HOST-A-NATOR

HOST-A-NATOR

* NAME

DESCRIPTION

* ORGANIZATION

* CUSTOM SCRIPT

CANCEL

SAVE

INVENTORY SCRIPTS 1

+ ADD

NAME

SEARCH

NAME	DESCRIPTION	ORGANIZATION	ACTIONS
Host-a-nator	Host Populator	Honey Dog, Inc.	

ITEMS 1-1 OF 1

3.1 Writing Inventory Scripts

You can write inventory scripts in any dynamic language that you have installed on the Tower machine (such as shell or python). They must start with a normal script shebang line such as `#!/bin/bash` or `#!/usr/bin/python`. They run as the `awx` user. The inventory script invokes with `'--list'` to list the inventory, which returns in a JSON hash/dictionary.


Generally, they connect to the network to retrieve the inventory from other sources. When enabling multi-tenancy security (refer to [Security](#) for details), the inventory script will not be able to access most of the Tower machine. If this access to the local Tower machine is necessary, configure it in `/etc/tower/settings.py`.

For more information on dynamic inventory scripts and how to write them, refer to the [Intro to Dynamic Inventory](#) and [Developing Dynamic Inventory Sources](#) sections of the Ansible documentation, or review the [example dynamic inventory scripts](#) on GitHub.

MANAGEMENT JOBS

Management Jobs assist in the cleaning of old data from Tower, including system tracking information, job histories, and activity streams. You can use this if you have specific retention policies or need to decrease the storage used by


your Tower database. From the Settings () menu, click on **Management Jobs**.

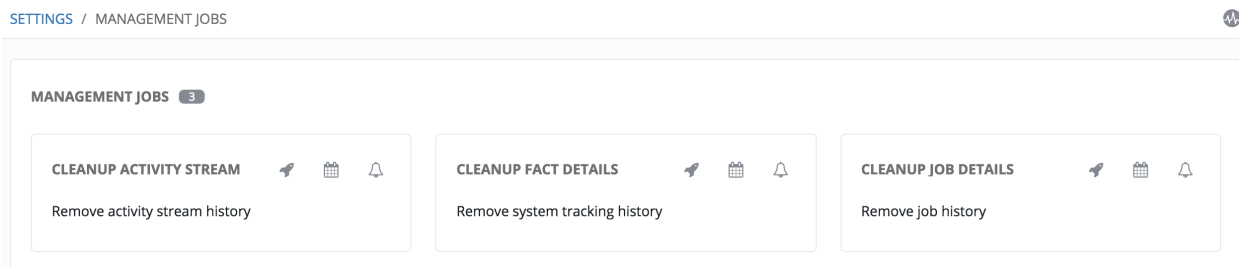

Several job types are available for you to schedule and launch:

- **Cleanup Activity Stream:** Remove activity stream history older than a specified number of days
- **Cleanup Fact Details:** Remove system tracking history
- **Cleanup Job Details:** Remove job history older than a specified number of days

4.1 Removing Old Activity Stream Data

To remove older activity stream data, click on the  button beside **Cleanup Activity Stream**.

CLEANUP ACTIVITY STREAM


Set how many days of data should be retained.

30






CANCEL LAUNCH

Enter the number of days of data you would like to save and click **Launch**.


4.1.1 Scheduling

To review or set a schedule for purging data marked for deletion, click on the  button.

[SETTINGS](#) / [MANAGEMENT JOBS](#) / [SCHEDULES](#)

CLEANUP ACTIVITY STREAM SCHEDULES 				+ ADD
NAME	SEARCH			
NAME ^	FIRST RUN ^	NEXT RUN ^	FINAL RUN ^	ACTIONS
 Cleanup Activity Schedule	7/5/2016 9:33:09 AM	7/12/2016 9:33:09 AM		 
ITEMS 1-1 OF 1				

Note that you can turn this scheduled management job on and off easily using the **ON/OFF** toggle button to the left of the Job Name.

Click on the Job Name, in this example “Cleanup Activity Schedule”, to review or edit the schedule settings. You can also use the  button to create a new schedule for this management job.

TOWER

PROJECTS

INVENTORIES

JOB TEMPLATES

JOBS

admin

SETTINGS / MANAGEMENT JOBS / SCHEDULES / EDIT SCHEDULED JOB

CLEANUP ACTIVITY SCHEDULE

* NAME

Cleanup Activity Schedule

* START DATE (MM/DD/YYYY)

06/30/2016

* START TIME (HH24:MM:SS)

09:33:09

* LOCAL TIME ZONE

America/New_York

* REPEAT FREQUENCY

Week

* DAYS OF DATA TO KEEP

355

FREQUENCY DETAILS

* EVERY

1

WEEKS

* ON DAYS

SUN MON **TUE** WED THU FRI SAT

* END

Never

SCHEDULE DESCRIPTION

every week on Tuesday

OCCURRENCES (Limited to first 10)

DATE FORMAT ☒ LOCAL TIME ☐ UTC

07/05/2016 09:33:09 EDT

07/12/2016 09:33:09 EDT

07/19/2016 09:33:09 EDT

07/26/2016 09:33:09 EDT

08/02/2016 09:33:09 EDT

08/09/2016 09:33:09 EDT

08/16/2016 09:33:09 EDT

08/23/2016 09:33:09 EDT

08/30/2016 09:33:09 EDT

09/06/2016 09:33:09 EDT

CANCEL

SAVE

CLEANUP ACTIVITY STREAM | SCHEDULES 1

+ ADD

NAME SEARCH

NAME	FIRST RUN	NEXT RUN	FINAL RUN	ACTIONS
ON Cleanup Activity Schedule	7/5/2016 9:33:09 AM	7/12/2016 9:33:09 AM		<div></div> <div></div>

ITEMS 1-1 OF 1

Copyright © 2016 Red Hat, Inc.

Enter the appropriate details into the following fields and select **Save**:

- Name (required)
- Start Date (required)
- Start Time (required)
- Local Time Zone (the entered Start Time should be in this timezone)
- Repeat Frequency (the appropriate options display as the update frequency is modified.)

The **Details** tab displays a description of the schedule and a list of the scheduled occurrences in the selected Local Time Zone.


Note: Jobs are scheduled in UTC. Repeating jobs that runs at a specific time of day may move relative to a local


4.1. Removing Old Activity Stream Data

11


timezone when Daylight Saving Time shifts occur.


4.1.2 Notifications

To set or review notifications associated with this management job, click the Configure Notifications () button.


You can also access notifications through the Settings () menu.

[SETTINGS](#) / [MANAGEMENT JOBS](#) / [NOTIFICATIONS](#)

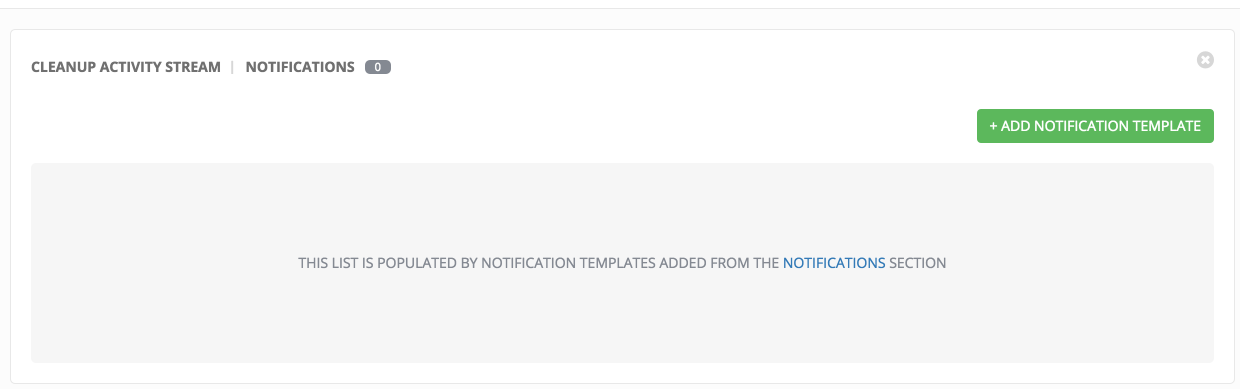


Click the  button to create a new notification. Notification types include:

- Email
- Slack
- Twilio
- PagerDuty
- HipChat
- Webhook
- IRC

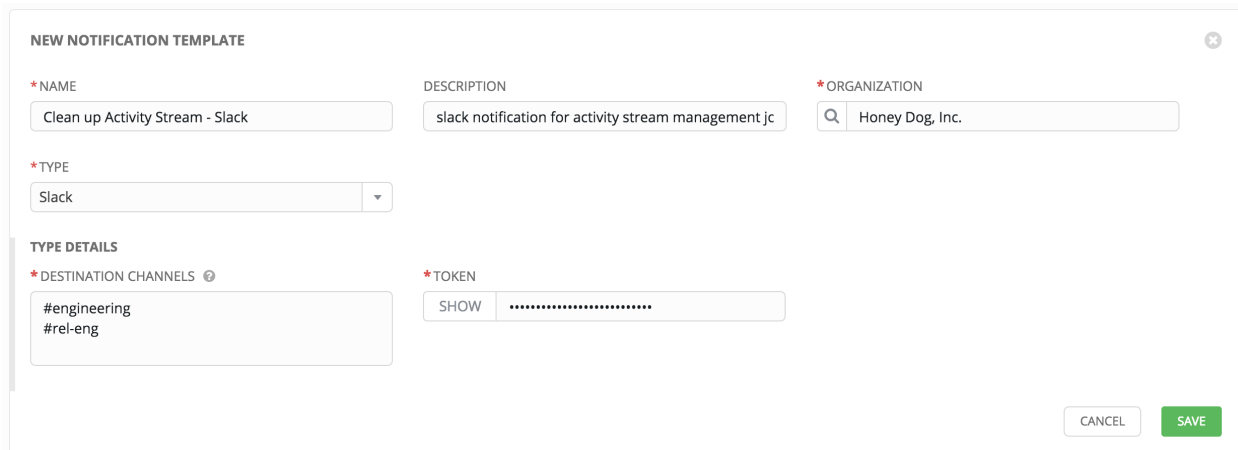

Refer to [Notifications](#) in the *Ansible Tower User Guide* for more information.

4.2 Removing Old Fact (System Tracking) Data

To remove system tracking data, click on the  button beside **Cleanup Fact Details**.

CLEANUP FACT DETAILS

For facts collected older than the time period specified, save one fact scan (snapshot) per time window (frequency). For example, facts older than 30 days are purged, while one weekly fact scan is kept.

CAUTION: Setting both numerical variables to "0" will delete all facts.

*** SELECT A TIME PERIOD AFTER WHICH TO REMOVE OLD FACTS**


*** SELECT A FREQUENCY FOR SNAPSHOT RETENTION**

Select the **time period** after which you want to remove old data as well as the **frequency** for snapshot retention.

For facts collected older than the time period specified, you can choose to save one fact scan (or snapshot) per period of time(frequency). For example, facts older than 30 days could be purged, while one weekly fact scan is retained.


Warning: Setting both numerical variables to "0" will delete all facts.

To help clarify this purge and retention schedule, consider the following timeline:

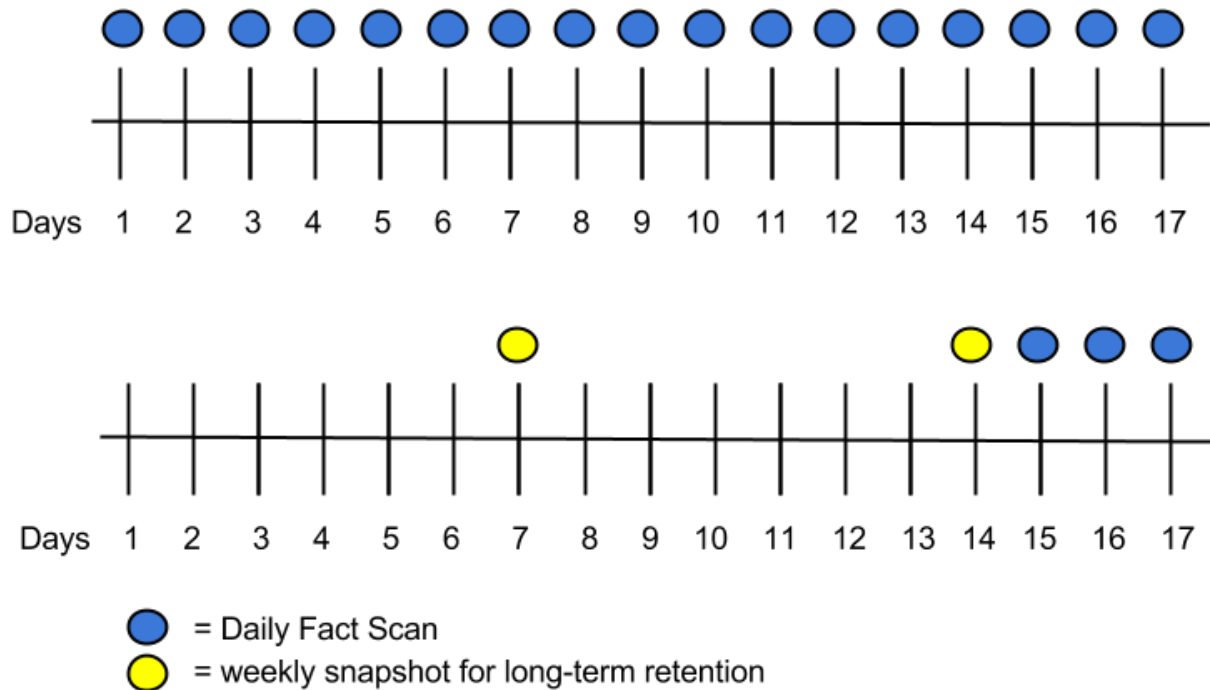

For this timeline example, consider that you have been running Tower for 17 days (since Jan 1st) and have collected 17 days of fact scans. On Jan 17, you decide to remove all fact scans older than 3 days while keeping a weekly snapshot. The most recent scan and a scan from one week earlier remains, along with the most recent data to be kept.

4.2.1 Scheduling

To review or set a schedule for cleaning up system tracking information, click on the  button.

[SETTINGS](#) / [MANAGEMENT JOBS](#) / [SCHEDULES](#)

CLEANUP FACT DETAILS | SCHEDULES 0
+ ADD

PLEASE ADD ITEMS TO THIS LIST

+ ADD

You can use the + ADD button to create a new schedule for this management job.

Enter the appropriate details into the following fields and select **Save**:


- Name (required)


- Start Date (required)
- Start Time (required)
- Local Time Zone (the entered Start Time should be in this timezone)
- Repeat Frequency (the appropriate options display as the update frequency is modified.)

The **Details** tab displays a description of the schedule and a list of the scheduled occurrences in the selected Local Time Zone.

Note: Jobs are scheduled in UTC. Repeating jobs that runs at a specific time of day may move relative to a local timezone when Daylight Saving Time shifts occur.

4.2.2 Notifications

To set or review notifications associated with this management job, click the Configure Notifications () button.

You can also access notifications through the Settings () menu.

[SETTINGS](#) / [MANAGEMENT JOBS](#) / NOTIFICATIONS



CLEANUP FACT DETAILS | NOTIFICATIONS 0

+ ADD NOTIFICATION TEMPLATE

THIS LIST IS POPULATED BY NOTIFICATION TEMPLATES ADDED FROM THE [NOTIFICATIONS](#) SECTION

+ ADD NOTIFICATION TEMPLATE

Click the button to create a new notification. Notification types include:

- Email
- Slack
- Twilio
- PagerDuty
- HipChat
- Webhook
- IRC

[SETTINGS](#) / [NOTIFICATION TEMPLATES](#) / CREATE NOTIFICATION TEMPLATE

NEW NOTIFICATION TEMPLATE

* NAME

Clean Up Facts - Slack

DESCRIPTION

management job for fact cleaning - slack notification

* ORGANIZATION

Q

Honey Dog, Inc.

* TYPE

Slack

TYPE DETAILS

* DESTINATION CHANNELS

#engineering
#rel-eng

* TOKEN

SHOW


.....

CANCEL

SAVE

Refer to [Notifications](#) in the *Ansible Tower User Guide* for more information.

4.3 Removing Old Job History

To remove job history older than a specified number of days, click on the  button beside **Cleanup Job Details**.

CLEANUP JOB DETAILS

Set how many days of data should be retained.


30

CANCEL

LAUNCH

Enter the number of days of data you would like to save and click **Launch**.

4.3.1 Scheduling

To review or set a schedule for cleaning up job history, click on the  button.

[SETTINGS](#) / [MANAGEMENT JOBS](#) / [SCHEDULES](#)

CLEANUP JOB DETAILS | SCHEDULES 1

+ ADD

NAME

SEARCH


Q

NAME ^	FIRST RUN ↕	NEXT RUN ↕	FINAL RUN ↕	ACTIONS
<div>ON</div> Cleanup Job Schedule	7/3/2016 9:33:09 AM	7/10/2016 9:33:09 AM		<div></div> <div></div>

ITEMS 1-1 OF 1

Note that you can easily turn this scheduled management job on and off easily using the **ON/OFF** toggle button to the left of the Job Name.

Click on the Job Name, in this example “Cleanup Job Schedule”, to review or edit the schedule settings. You can also

use the  button to create a new schedule for this management job.

TOWER

PROJECTS

INVENTORIES

JOB TEMPLATES

JOB

admin

SETTINGS / MANAGEMENT JOBS / SCHEDULES / EDIT SCHEDULED JOB

CLEANUP JOB SCHEDULE

* NAME

Cleanup Job Schedule

* START DATE (MM/DD/YYYY)

06/30/2016

* START TIME (HH24:MM:SS)

09:33:09

* LOCAL TIME ZONE

America/New_York

* REPEAT FREQUENCY

Week

* DAYS OF DATA TO KEEP

120

FREQUENCY DETAILS

* EVERY

1

WEEKS

* ON DAYS

SUN MON TUE WED THU FRI SAT

* END

Never

SCHEDULE DESCRIPTION

every week on Sunday

OCCURRENCES (Limited to first 10)

DATE FORMAT ☒ LOCAL TIME ☐ UTC

07/03/2016 09:33:09 EDT

07/10/2016 09:33:09 EDT

07/17/2016 09:33:09 EDT

07/24/2016 09:33:09 EDT

07/31/2016 09:33:09 EDT

08/07/2016 09:33:09 EDT

08/14/2016 09:33:09 EDT

08/21/2016 09:33:09 EDT

08/28/2016 09:33:09 EDT

09/04/2016 09:33:09 EDT

CANCEL

SAVE

CLEANUP JOB DETAILS | SCHEDULES 1

+ ADD

NAME SEARCH

NAME	FIRST RUN	NEXT RUN	FINAL RUN	ACTIONS
ON Cleanup Job Schedule	7/3/2016 9:33:09 AM	7/10/2016 9:33:09 AM		

ITEMS 1-1 OF 1

Copyright © 2016 Red Hat, Inc.

Enter the appropriate details into the following fields and select **Save**:

- Name (required)
- Start Date (required)
- Start Time (required)
- Local Time Zone (the entered Start Time should be in this timezone)
- Repeat Frequency (the appropriate options display as the update frequency is modified.)

The **Details** tab displays a description of the schedule and a list of the scheduled occurrences in the selected Local Time Zone.


Note: Jobs are scheduled in UTC. Repeating jobs that runs at a specific time of day may move relative to a local


4.3. Removing Old Job History


18

timezone when Daylight Saving Time shifts occur.

4.3.2 Notifications

To set or review notifications associated with this management job, click the Configure Notifications () button.

You can also access notifications through the Settings () menu.

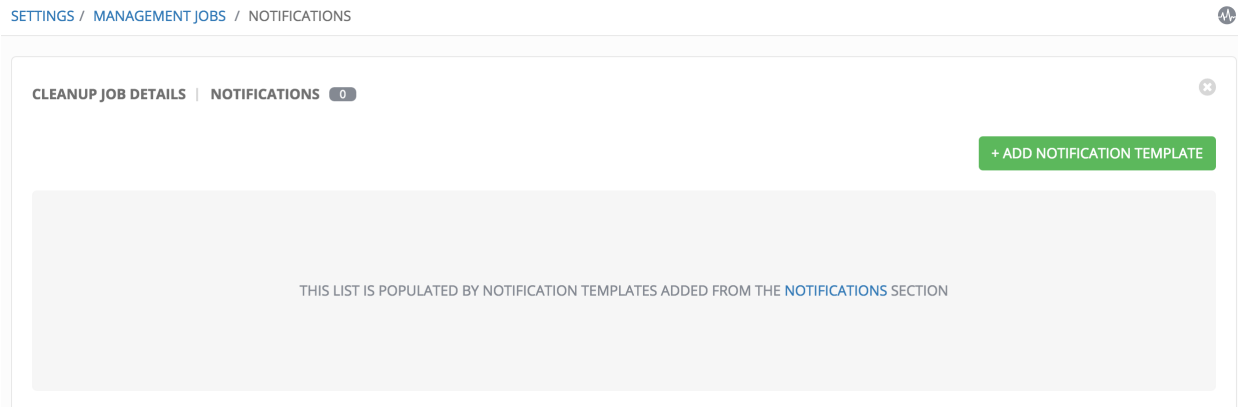

Click the  button to create a new notification. Notification types include:

- Email
- Slack
- Twilio
- PagerDuty
- HipChat
- Webhook
- IRC

SETTINGS / NOTIFICATION TEMPLATES / CREATE NOTIFICATION TEMPLATE

NEW NOTIFICATION TEMPLATE

* NAME

Clean Up Job Details - Slack

DESCRIPTION

management job, cleanup job details, slack notificat

* ORGANIZATION

Q

Honey Dog, Inc.

* TYPE

Slack

TYPE DETAILS

* DESTINATION CHANNELS ⓘ

#engineering
#rel-eng

* TOKEN

SHOW

CANCEL

SAVE

Refer to [Notifications](#) in the *Ansible Tower User Guide* for more information.

4.3. Removing Old Job History

20

CLUSTERING

Ansible Tower 3.1 introduces Clustering as an alternate approach to redundancy, replacing the redundancy solution configured with the active-passive nodes that involves primary and secondary instances. For versions older than 3.1, refer to the older versions of this chapter of the *Ansible Tower Administration Guide*.

Clustering is sharing load between hosts. Each node should be able to act as an entry point for UI and API access. This should enable Tower administrators to use load balancers in front of as many nodes as they wish and maintain good data visibility.

Note: Load balancing is optional and is entirely possible to have ingress on one or all nodes as needed.

Each node should be able to join the Tower cluster and expand its ability to execute jobs. This is currently a simple system where jobs can and will run anywhere rather than be directed on where to run.

5.1 Setup Considerations

Important considerations to note in the new clustering environment:

- PostgreSQL is still a standalone instance node and is not clustered. Tower does not manage replica configuration or database failover (if the user configures standby replicas).
- All nodes should be reachable from all other nodes and they should be able to reach the database. It is also important for the hosts to have a stable address and/or hostname (depending on how the Tower host is configured).
- RabbitMQ is the cornerstone of Tower's clustering system. A lot of the configuration requirements and behavior is dictated by its needs. Therefore, customization beyond Tower's setup playbook is limited. Each Tower node has a deployment of RabbitMQ that will cluster with the other nodes' RabbitMQ instances.
- Existing old-style HA deployments will be migrated automatically to the new HA system during the upgrade process.
- Manual projects must be manually synced to all nodes by the customer, and updated on all nodes at once.
- There is no concept of primary/secondary in the new Tower system. All systems are primary.
- Setup playbook changes to configure RabbitMQ and provide the type of network the hosts are on.
- The `inventory` file for Tower deployments should be saved/persisted. If new nodes are to be provisioned, the passwords and configuration options, as well as host names, must be made available to the installer.

5.2 Install and Configure

Provisioning new nodes should be as simple as updating the `inventory` file and re-running the setup playbook. It is important that this file contain all passwords and information used when installing the cluster or other nodes may be reconfigured. The current standalone node configuration does not change for a 3.1 deployment. The `inventory` file does change in some important ways:

- Since there is no primary/secondary configuration, those inventory groups go away and are replaced with a single inventory group, `tower`. The database group remains for specifying an external Postgres, however:

```
[tower]
hostA
hostB
hostC

[database]
hostDB
```

Note: A minimum of three Tower nodes is recommended in a cluster.

- The `redis_password` field is removed from `[all:vars]`
- New fields for RabbitMQ are as follows:
 - `rabbitmq_port=5672`: RabbitMQ is installed on each node and is not optional, it's also not possible to externalize it. This setting configures what port it listens on.
 - `rabbitmq_vhost=tower`: Controls the setting for which Tower configures a RabbitMQ virtualhost to isolate itself.
 - `rabbitmq_username=tower` and `rabbitmq_password=tower`: Each node and each node's Tower instance are configured with these values. This is similar to Tower's other uses of usernames/passwords.
 - `rabbitmq_cookie=<somevalue>`: This value is unused in a standalone deployment but is critical for clustered deployments. This acts as the secret key that allows RabbitMQ cluster members to identify each other.
 - `rabbitmq_use_long_names`: RabbitMQ is sensitive to what each node is named. Tower is flexible enough to allow FQDNs (`host01.example.com`), short names (`host01`), or ip addresses (`192.168.5.73`). Depending on what is used to identify each host in the inventory file, this value may need to be changed:
 - * For FQDNs and IP addresses, this value needs to be `true`.
 - * For short names, set the value to `false`.
 - * If you are using `localhost`, do not change the default setting of `rabbitmq_use_long_name=false` to `true`.

5.2.1 RabbitMQ Default Settings

The following configuration shows the default settings for RabbitMQ:

```
rabbitmq_port=5672
rabbitmq_vhost=tower
rabbitmq_username=tower
rabbitmq_password=' '
```

```

rabbitmq_cookie=cookiemonster

# For FQDNs and IP addresses, this value needs to be true
rabbitmq_use_long_name=false
# Needs to remain false if you are using localhost

```

5.2.2 Nodes and Ports Used by Tower

Ports and nodes used by Tower are as follows:

- 80, 443 (normal Tower ports)
- 22 (ssh)
- 5432 (database node - if the database is installed on an external node, needs to be opened to the tower nodes)

Clustering/RabbitMQ ports:

- 4369, 25672 (ports specifically used by RabbitMQ to maintain a cluster, needs to be open between each node)
- 15672 (if the RabbitMQ Management Interface is enabled, this port needs to be opened (optional))

5.3 Status and Monitoring via Browser API

Tower itself reports as much status as it can via the Browsable API at `/api/v1/ping` in order to provide validation of the health of the cluster, including:

- The node servicing the HTTP request
- The timestamps of the last heartbeat of all other nodes in the cluster
- The state of the Job Queue, any jobs each node is running
- The RabbitMQ cluster status

5.4 Node Services and Failure Behavior

Each Tower node is made up of several different services working collaboratively:


- HTTP Services - This includes the Tower application itself as well as external web services.
- Callback Receiver - Receives job events from running Ansible jobs.
- Celery - The worker queue that processes and runs all jobs.
- RabbitMQ - This message broker is used as a signaling mechanism for Celery as well as any event data propagated to the application.
- Memcached - local caching service for the node it lives on.

Tower is configured in such a way that if any of these services or their components fail, then all services are restarted. If these fail sufficiently often in a short span of time, then the entire node will be placed offline in an automated fashion in order to allow remediation without causing unexpected behavior.

5.5 Job Runtime Behavior

The way jobs are run and reported to a ‘normal’ user of Tower does not change. On the system side, some differences are worth noting:

- When a job is submitted from the API interface it gets pushed into the Celery queue on RabbitMQ. A single RabbitMQ node is the responsible master for individual queues but each Tower node will connect to and receive jobs from that queue using a particular scheduling algorithm. Any node in the cluster is just as likely to receive the work and execute the task. If a node fails while executing jobs, then the work is marked as permanently failed.

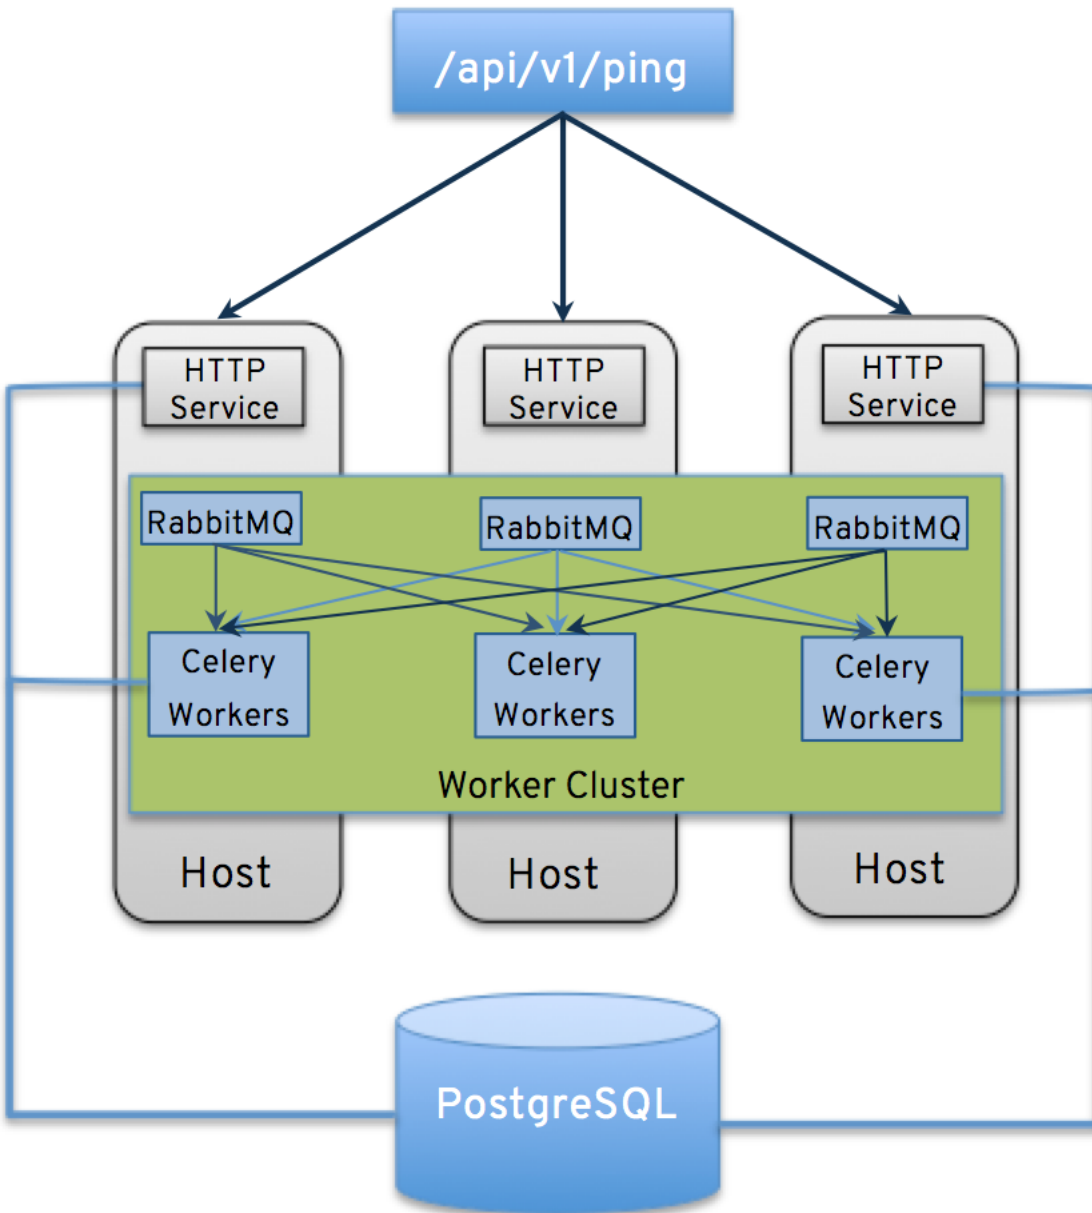

- As Tower nodes are brought online, it effectively expands the work capacity of the Tower system which is measured as one entire unit (the cluster’s capacity). Conversely, de-provisioning a node will remove capacity from the cluster. See *Deprovision Nodes* in the next section for more details.

Note: Not all nodes are required to be provisioned with an equal capacity.

- Project updates behave differently than they did before. Previously, they were ordinary jobs that ran on a single node. It's now important that they run successfully on any node that could potentially run a job. Projects will now sync themselves to the correct version on the node immediately prior to running the job.

5.6 Deprovision Nodes

Deprovisioning Tower does not automatically deprovision nodes since clusters do not currently distinguish between a node that was taken offline intentionally or due to failure. Instead, shutdown all services on the Tower node and then run the deprovisioning tool from any other node:

1. Shut down the node or stop the service with the command, `ansible-tower-service stop`.
2. Run the deprovision command `$ tower-manage deprovision_node ---name=<name used in inventory file>` from another node to remove it from the Tower cluster registry AND the RabbitMQ cluster registry.

Example: `tower-manage deprovision_node ---name=hostB`

PROXY SUPPORT

Proxy servers act as an intermediary for requests from clients seeking resources from other servers. A client connects to the proxy server, requesting some service or available resource from a different server, and the proxy server evaluates the request as a way to simplify and control its complexity.

Note: Using SSL offloading or using a proxy that handles SSL for Tower is supported. Tower requires that SSL handling by Tower be disabled, SSL needs to be offloaded to the proxy or load balancer, and that the proxy/load balancer needs to be configured to pass the remote host information. To disable SSL handling, set `nginx_disable_https=true` as an extra variable passed to the setup playbook. Refer to [The Setup Playbook](#) for information on applying extra variables to the setup playbook.

Sessions in Tower associate an IP address upon creation. Tower policy requires that any use of the session match the original associated IP address.

To provide proxy server support, Tower handles proxied requests (such as ELB in front of Tower, HAProxy, Squid, and tinypoxy) via the `REMOTE_HOST_HEADERS` list variable in Tower settings (`/etc/tower/conf.d/remote_host_headers.py`). By default `REMOTE_HOST_HEADERS` is set to `['REMOTE_ADDR', 'REMOTE_HOST']`.

To enable proxy server support, setup `REMOTE_HOST_HEADERS` like the following: `REMOTE_HOST_HEADERS = ['HTTP_X_FORWARDED_FOR', 'REMOTE_ADDR', 'REMOTE_HOST']`

Note: A new installation of Ansible Tower may not contain the `remote_host_headers.py` file. However, you can still set those values in the system settings API endpoint.

Tower determines the remote host's IP address by searching through the list of headers in `REMOTE_HOST_HEADERS` until the FIRST IP address is located.

Note: Header names are constructed using the following logic:

With the exception of `CONTENT_LENGTH` and `CONTENT_TYPE`, any HTTP headers in the request are converted to META keys by converting all characters to uppercase, replacing any hyphens with underscores, and adding an `HTTP_` prefix to the name. For example, a header called `X-Barkley` would be mapped to the META key `HTTP_X_Barkley`.

For more information on HTTP request and response objects, refer to: <https://docs.djangoproject.com/en/1.8/ref/request-response/#django.http.HttpRequest.META>

6.1 Configure Known Proxies

When Tower is configured with `REMOTE_HOST_HEADERS = ['HTTP_X_FORWARDED_FOR', 'REMOTE_ADDR', 'REMOTE_HOST']`, it assumes that the value of `X-Forwarded-For` has originated from the proxy/load balancer sitting in front of Tower. In a scenario where Tower is still reachable without use of the proxy/load balancer or when the proxy does not validate the header, `X-Forwarded-For` can be spoofed fairly easily to fake the originating IP addresses. Using `HTTP_X_FORWARDED_FOR` in the `REMOTE_HOST_HEADERS` setting poses a vulnerability that essentially gives users access to certain resources that they should not have.

To avoid this, you can configure a list of “known proxies” that are allowed, which is the `PROXY_IP_WHITELIST` setting via the settings API. Load balancers and hosts that are not on the list will result in a rejected request.

`PROXY_IP_WHITELIST` only works if the proxies in the list are properly sanitizing header input and correctly setting an `X-Forwarded-For` value equal to the real source IP of the client; the crux of this setting is that Tower can rely on the IPs/hostnames in `PROXY_IP_WHITELIST` to provide non-spoofed values for the `X-Forwarded-For` field.

`HTTP_X_FORWARDED_FOR` should **never** be configured as an item in `REMOTE_HOST_HEADERS` unless all of the following are satisfied:

- You are using a proxied environment w/ ssl termination
- The proxy provides sanitization/validation of the `X-Forwarded-For` header to prevent client spoofing
- `/etc/tower/conf.d/remote_host_headers.py` defines `PROXY_IP_WHITELIST` that contains only the originating IP of trusted proxies/load balancers.

6.2 Reverse Proxy

If you are behind a reverse proxy, you may want to setup a header field for `HTTP_X_FORWARDED_FOR`. The `X-Forwarded-For` (XFF) HTTP header field identifies the originating IP address of a client connecting to a web server through an HTTP proxy or load balancer.

```
REMOTE_HOST_HEADERS = ['HTTP_X_FORWARDED_FOR', 'REMOTE_ADDR', 'REMOTE_HOST']
```

TOWER LOGFILES

Tower logfiles have been consolidated and can be easily accessed from two centralized locations:

- `/var/log/tower/`
- `/var/log/supervisor/`

In the `/var/log/tower/` directory, you can view logfiles related to:

- `callback_receiver.log`
- `fact_receiver.log`
- `setup-XX-XX-XX-XX.log`
- `socketio_service.log`
- `task_system.log`
- `tower.log`

In the `/var/log/supervisor/` directory, you can view logfiles related to:

- `awx-celery.log`
- `supervisord.log`

The `/var/log/supervisor/` directory include `stdout` files for all services as well.

```
"Mooving around: Consolidated logfiles for easier access!"
```

```
\
 \  ^__^
    (oo)\_____
        (__)\       )\/\
            ||----w |
            ||     ||
```


TOWER LOGGING AND AGGREGATION

Logging is a standalone feature introduced in Ansible Tower 3.1.0 that provides the capability to send detailed logs to several kinds of 3rd party external log aggregation services. Services connected to this data feed serve as a useful means in gaining insight into Tower usage or technical trends. The data can be used to analyze events in the infrastructure, monitor for anomalies, and correlate events from one service with events in another. The types of data that are most useful to Tower are job fact data, job events/job runs, activity stream data, and log messages. The data is sent in JSON format over a HTTP connection using minimal service-specific tweaks engineered in a custom handler or via an imported library.

8.1 Logging Aggregator Services

The logging aggregator service works with the following monitoring and data analysis systems:

- *Splunk*
- *Loggly*
- *Sumologic*
- *Elastic stack (formerly ELK stack)*

8.1.1 Splunk

Ansible Tower's Splunk logging integration uses the Splunk HTTP Collector. For details on setting up the HTTP Event Collector, refer to <http://docs.splunk.com/Documentation/Splunk/latest/Data/UsetheHTTPEventCollector> for further instructions.

8.1.2 Loggly

To set up the sending of logs through Loggly's HTTP endpoint, refer to <https://www.loggly.com/docs/http-endpoint/>. Loggly uses the URL convention described at <http://logs-01.loggly.com/inputs/TOKEN/tag/http/>, which is shown inputted in the **Logging Aggregator** field in the example below:

* LOGGING AGGREGATOR ⓘ REVERT

<http://logs-01.loggly.com/inputs/5b9ad697-81f9-4249-9e76->

8.1.3 Sumologic

In Sumologic, create a search criteria containing the json files that provide the parameters used to collect the data you need.

The screenshot shows the Sumologic web interface. At the top, there's a navigation bar with 'sumologic' logo and links for Library, Search, Metrics, Dashboards, Manage, and Help. The user 'Alan (Re)' is logged in. Below the navigation bar, there's a search bar with the query: `| json field=_raw "message" as message2`, `| json field=_raw "actor" as actor`, and `| json field=_raw "object1" as object1`. The search results show a timeline view with a bar chart. A message detail view is open, showing the 'actor' field with a value of 'admin' and a count of 2. The message content is a JSON object: `{ "object1": "project", "host": "tower", "logger_name": "awx.analytics.activity_stream", "path": "./awx/main/middleware.py", "message": "Activity Stream update entry for project", "operation": "update", "changes": { "name": ["AlanCoding exampleszzzsafasdfqoqtz"], "level": "INFO", "@version": "1", "object2": "", "actor": "admin", "type": "Logstash" } }`. The message is from 'Host: 207.67.11.130' and is categorized as 'Http Input'.

8.1.4 Elastic stack (formerly ELK stack)

You can visualize information from the Tower logs in Kibana, captured via an Elastic stack consuming the logs. Ansible Tower provides compatibility with the logstash connector, and compatibility with the data model of elastic search. You can use the example settings, and either a library or provided examples to stand up containers that will demo the Elastic stack use end-to-end.

Tower uses logstash configuration to specify the source of the logs. Use this template to provide the input:

```
input {
  http {
    port => 8085
  }
}
```

```

    user => logger_username
    password => "password"
  }
}

```

Add this to your configuration file in order to process the message content:


```


filter {
  json {
    source => "message"
  }
}


```

8.2 Set Up Logging with Tower

To set up logging to any of the aggregator types:

1. From the Settings () Menu screen, click on **Configure Tower**.
2. Select the **System** tab.
3. Select **Logging** from the Sub Category drop-down menu list.
4. Set the configurable options from the fields provided:
 - **Logging Aggregator:** Enter the hostname or IP address you want to send logs.
 - **Logging Aggregator Port:** Specify the port for the aggregator if it requires one.
 - **Logging Aggregator Type:** Click to select the aggregator service from the drop-down menu:

*** LOGGING AGGREGATOR TYPE**  REVERT

Select types 

logstash



splunk

loggly

sumologic

other

- **Logging Aggregator Username:** Enter the username of the logging aggregator if it requires it.
- **Logging Aggregator Password/Token:** Enter the password of the logging aggregator if it requires it.


- **Loggers to Send Data to the Log Aggregator From:** All four types of data are pre-populated by default. Click the tooltip  icon next to the field for additional information on each data type. Delete the data types you do not want.
 - **Log System Tracking Facts Individually:** Click the tooltip  icon for additional information whether or not you want to turn it on, or leave it off by default.
 - **Enable External Logging:** Click the toggle button to **ON** if you want to send logs to an external log aggregator.
5. Review your entries for your chosen logging aggregation. Below is an example of one set up for Splunk:

SETTINGS / EDIT CONFIGURATION


CONFIGURE TOWER

AUTHENTICATION JOBS **SYSTEM** USER INTERFACE


SUB CATEGORY Logging

* LOGGING AGGREGATOR  REVERT


172.16.185.132


LOGGING AGGREGATOR PORT  REVERT

80


* LOGGING AGGREGATOR TYPE  REVERT

splunk


LOGGING AGGREGATOR USERNAME  REVERT

LOGGING AGGREGATOR PASSWORD/TOKEN  REVERT


SHOW

LOGGERS TO SEND DATA TO THE LOG AGGREGATOR FROM  REVERT

awx, activity_stream, job_events

LOG SYSTEM TRACKING FACTS INDIVIDUALLY 

☐ OFF

ENABLE EXTERNAL LOGGING 

☒ ON

REVERT ALL TO DEFAULT

CANCEL SAVE

6. When done, click **Save** to apply the settings or **Cancel** to abandon the changes.

8.3 SSL Certificate Verification

SSL certificate verification is enabled for logging aggregation by default. Ansible Tower 3.1.3 allows you to disable it by manually adding the following environment variable in your local `settings.py` file and setting it to `False`:

```
LOG_AGGREGATOR_VERIFY_CERT = False
```

THE *TOWER-MANAGE* UTILITY

The `tower-manage` (formerly `awx-manage`) utility is used to access detailed internal information of Tower. Commands for `tower-manage` should run as the `awx` or `root` user.

9.1 Inventory Import

`tower-manage` is a mechanism by which a Tower administrator can import inventory directly into Tower, for those who cannot use Custom Inventory Scripts.

To use `tower-manage` properly, you must first create an inventory in Tower to use as the destination for the import.

For help with `tower-manage`, run the following command: `tower-manage inventory_import [--help]`

The `inventory_import` command synchronizes a Tower inventory object with a text-based inventory file, dynamic inventory script, or a directory of one or more of the above as supported by core Ansible.

When running this command, specify either an `--inventory-id` or `--inventory-name`, and the path to the Ansible inventory source (`--source`).

```
tower-manage inventory_import --source=/ansible/inventory/ --inventory-id=1
```

By default, inventory data already stored in Tower blends with data from the external source. To use only the external data, specify `--overwrite`. To specify that any existing hosts get variable data exclusively from the `--source`, specify `--overwrite_vars`. The default behavior adds any new variables from the external source, overwriting keys that do not already exist, but preserves any variables that were not sourced from the external data source.

```
tower-manage inventory_import --source=/ansible/inventory/ --inventory-id=1 --  
→overwrite
```

Note: With the release of Ansible Tower 2.4.0, edits and additions to Inventory host variables now persist beyond an inventory sync as long as `--overwrite_vars` is **not** set. To have inventory syncs behave as they did before, it is now required that both `--overwrite` and `--overwrite_vars` are set.

9.2 Cleanup of old data

`tower-manage` has a variety of commands used to clean old data from Tower. Tower administrators can use the Tower Management Jobs interface for access or use the command line.

- `tower-manage cleanup_jobs [--help]`

This permanently deletes the job details and job output for jobs older than a specified number of days.

- `tower-manage cleanup-deleted [--help]`

This permanently deletes any deleted Tower objects that are older than a specified number of days.

- `tower-manage cleanup_activitystream [--help]`

This permanently deletes any *activity stream* data older than a specific number of days.

9.3 HA management

Refer to the [Clustering](#) section for details on the `tower-manage register_instance` and `tower-manage remove_instance` commands.


Note: Do not run other `tower-manage` commands unless instructed by Ansible Support.

TOWER CONFIGURATION

In Ansible Tower version 3.1.0, you can configure various Tower settings within the Tower user interface, in the following tabs:


- **Authentication:** Enable simplified login for your Tower applications.
- **Jobs:** Update settings pertaining to Jobs within Tower.
- **System:** Define system-level features and functions.
- **User Interface:** Set the level of data collection for use in usability analytics.


Each tab contains fields with a **Reset** button, allowing you to revert any value entered back to the default value. **Reset All** allows you to revert all the values in the Edit Tower Configuration to their factory default values.

Save applies changes you make, but it does not exit the edit dialog. Click () to return to the Settings Menu screen.

10.1 Authentication

Through the Tower user interface, you can set up a simplified login through various authentication types: GitHub, Google, LDAP, RADIUS, and SAML. After you create and register your developer application with the appropriate service, you can set up authorizations for them. Since configuration files are now saved to the postgres DB in Ansible Tower 3.1 instead of flat files, setting up authorizations in the Ansible Tower User Interface is the recommended method.

1. From the Settings () Menu screen, click **Configure Tower**.
2. The Authentication tab displays initially by default. Select the appropriate authentication type from the drop-down list.

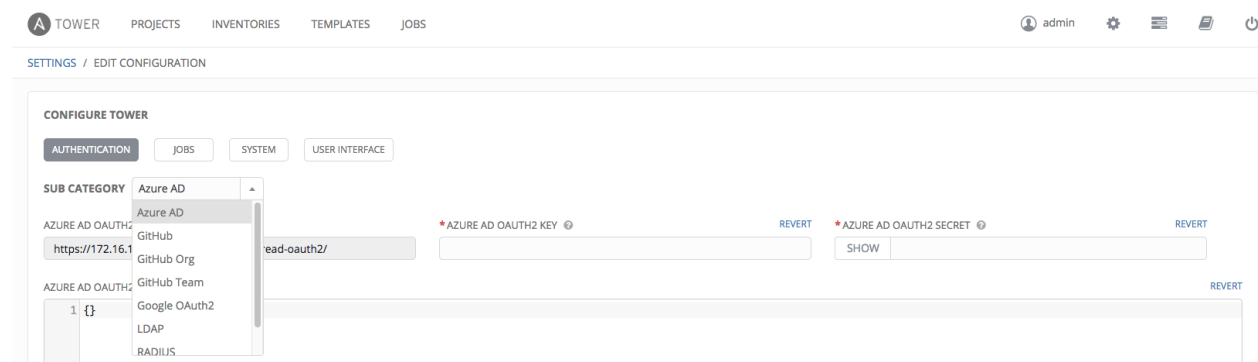



Different authentication types require you to enter different information. Be sure to include all the information as required.

Note: For more detail about each authentication type, refer to the [Setting Up Authentication](#) section of the Administration Guide.


3. Click **Save** to apply the settings or **Cancel** to abandon the changes.

10.2 Jobs

The Jobs tab allows you to configure the types of modules that are allowed to be used by Tower's Ad Hoc Commands feature, set limits on the number of jobs that can be scheduled, define their output size, and other details pertaining to working with Jobs in Tower.

1. From the Settings () Menu screen, click on **Configure Tower**.
2. Select the **Jobs** tab.
3. Set the configurable options from the fields provided. Click the tooltip  icon next to the field that you need additional information or details about.

Note: The value for **Default Job Timeout** is in seconds.

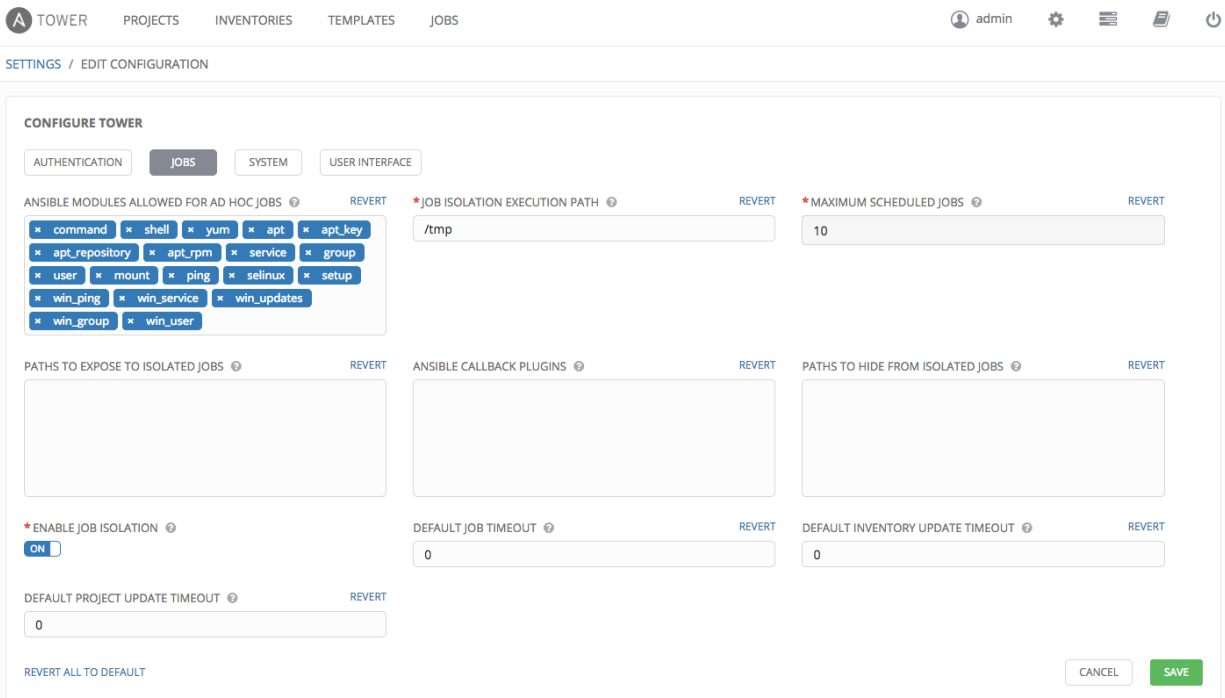



The screenshot shows the 'Configure Tower' interface with the 'JOBS' tab selected. The 'ANSIBLE MODULES ALLOWED FOR AD HOC JOBS' section is expanded, displaying a grid of module buttons: command, shell, yum, apt, apt_key, apt_repository, apt_rpm, service, group, user, mount, ping, selinux, setup, win_ping, win_service, win_updates, win_group, and win_user. Other settings include 'JOB ISOLATION EXECUTION PATH' set to '/tmp', 'MAXIMUM SCHEDULED JOBS' set to 10, 'ENABLE JOB ISOLATION' checked, 'DEFAULT JOB TIMEOUT' set to 0, 'DEFAULT INVENTORY UPDATE TIMEOUT' set to 0, and 'DEFAULT PROJECT UPDATE TIMEOUT' set to 0. The interface includes 'REVERT' and 'SAVE' buttons at the bottom right.

4. Click **Save** to apply the settings or **Cancel** to abandon the changes.

10.3 System

The System tab allows you to define the base URL for the Tower host, configure alerts, enable activity capturing, control visibility of users, enable certain Tower features and functionality through a license file, and configure logging aggregation options.

1. From the Settings () Menu screen, click on **Configure Tower**.
2. Select the **System** tab.
3. Select an option from the Sub Category drop-down menu list:
 - **Misc. System:** define the base URL for the Tower host, enable tower administration alerts, and allow all users to be visible to organization administrators.
 - **Activity Stream:** enable or disable activity stream.
 - **Logging:** configure logging options based on the type you choose:

*** LOGGING AGGREGATOR TYPE**  REVERT

Select types ▲

logstash


splunk

loggly

sumologic

other

For more information about each of the logging aggregation types, refer to the [Tower Logging and Aggregation](#) section of the Administration Guide.


4. Set the configurable options from the fields provided. Click the tooltip  icon next to the field that you need additional information or details about.

SETTINGS / EDIT CONFIGURATION

CONFIGURE TOWER


AUTHENTICATION JOBS **SYSTEM** USER INTERFACE

SUB CATEGORY Misc. System ▼


*** BASE URL OF THE TOWER HOST** 

https://172.16.185.128

[REVERT](#)

*** ENABLE TOWER ADMINISTRATOR ALERTS** 

ON

*** ALL USERS VISIBLE TO ORGANIZATION ADMINS** 

ON

[REVERT ALL TO DEFAULT](#) [CANCEL](#) [SAVE](#)


4. Click **Save** to apply the settings or **Cancel** to abandon the changes.

10.4 User Interface

The User Interface tab allows you to set Tower analytics settings, as well as configure custom logos and login messages.

The screenshot shows the 'CONFIGURE TOWER' interface with the 'USER INTERFACE' tab selected. The 'ANALYTICS TRACKING STATE' is set to 'Off'. The 'CUSTOM LOGO' section has a 'BROWSE' button and 'Choose file' text. The 'CUSTOM LOGIN INFO' section has a large text area. At the bottom, there are 'RESET ALL', 'CANCEL', and 'SAVE' buttons.

Ansible Tower collects user data automatically to help improve the Tower product. You can control the way Tower collects data by setting your participation level in the User Interface tab.

1. From the Settings () Menu screen, click on **Configure Tower**.
2. Select the **User Interface** tab.
3. Select the desired level of data collection from the Analytics Tracking State drop-down list:
 - **Off**: Prevents any data collection.
 - **Anonymous**: Enables data collection without your specific user data.
 - **Detailed**: Enables data collection including your specific user data.
4. Click **Save** to apply the settings or **Cancel** to abandon the changes.

You can also add a custom logo by uploading an image and supply a custom login message from this screen.

Refer to the tooltips () for acceptable formats.

BUBBLEWRAP FUNCTIONALITY AND VARIABLES

The bubblewrap functionality in Ansible Tower limits which directories on the Tower file system are available for playbooks to see and use during playbook runs. You may find that you need to customize your bubblewrap settings in some cases. To fine tune your usage of bubblewrap, there are certain variables that can be set.

To disable bubblewrap support for running jobs (playbook runs only):

```
AWX_PROOT_ENABLED = False
```

To enable bubblewrap support for running jobs (playbook runs only):

```
AWX_PROOT_ENABLED = True
```

By default, the Tower will use the system's `tmp` directory (`/tmp` by default) as its staging area. This can be changed in the **Job Isolation Execution Path** field of the Configure tower screen, or by updating the following entry in the settings file:

```
AWX_PROOT_BASE_PATH = "/opt/tmp"
```

If there is other information on the system that is sensitive and should be hidden, you can specify those in the Configure Tower screen in the **Paths to Hide to Isolated Jobs** or by updating the following entry in the settings file:

```
AWX_PROOT_HIDE_PATHS = ['/list/of/', '/paths']
```

If there are any directories that should specifically be exposed, you can specify those in the Configure Tower screen in the **Paths to Expose to Isolated Jobs** or by updating the following entry in the settings file:

```
AWX_PROOT_SHOW_PATHS = ['/list/of/', '/paths']
```

Note: The primary file you may want to add to `AWX_PROOT_SHOW_PATHS` is `/var/lib/awx/.ssh`, if your playbooks need to use keys or settings defined there.

If you made changes in the settings file, be sure to restart services with the `ansible-tower-service restart` command after your changes have been saved.

SETTING UP SOCIAL AUTHENTICATION

Authentication methods help simplify logins for end users—offering single sign-ons using existing login information to sign into a third party website rather than creating a new login account specifically for that website.

Prior to Ansible Tower version 3.1, account authentication can only be configured in the `/etc/tower/settings.py` or the configuration files within `/etc/tower/conf.d/`. Starting with Ansible Tower version 3.1, instead of flat files, the configuration files are now saved to the Postgres database. Therefore, it is important that account authentication be configured in the Ansible Tower User Interface. For instructions, refer to the *Tower Configuration* section.

Account authentication in Ansible Tower can be configured to centrally use OAuth2, while enterprise-level account authentication can be configured for SAML, RADIUS, or even LDAP as a source for authentication information.


For websites, such as Microsoft Azure, Google or GitHub, that provide account information, account information is often implemented using the OAuth standard. OAuth is a secure authorization protocol which is commonly used in conjunction with account authentication to grant 3rd party applications a “session token” allowing them to make API calls to providers on the user’s behalf.

SAML (Security Assertion Markup Language) is an XML-based, open-standard data format for exchanging account authentication and authorization data between an identity provider and a service provider.

The RADIUS distributed client/server system allows you to secure networks against unauthorized access and can be implemented in network environments requiring high levels of security while maintaining network access for remote users.

12.1 Google OAuth2 Settings

To set up social authentication for Google, you will need to obtain an OAuth2 key and secret for a web application. To do this, you must first create a project and set it up with Google. Refer to <https://support.google.com/googleapi/answer/6158849> for instructions. If you already completed the setup process, you can access those credentials by going to the Credentials section of the [Google API Manager Console](#). The OAuth2 key (Client ID) and secret (Client secret) will be used to supply the required fields in the Ansible Tower User Interface.

1. In the Ansible Tower User Interface, click **Configure Tower** from the Settings () Menu screen.

The Authentication tab displays initially by default.

2. In the Sub Category field, select **Google OAuth2** from the drop-down list.

SETTINGS / EDIT CONFIGURATION

CONFIGURE TOWER

AUTHENTICATION JOBS SYSTEM USER INTERFACE

SUB CATEGORY Google OAuth2

GOOGLE OAUTH2 GitHub

https://172.16.1.100:8080/google-oauth2/

GOOGLE OAUTH2 GitHub Org

GOOGLE OAUTH2 GitHub Team

GOOGLE OAUTH2 Google OAuth2

GOOGLE OAUTH2 LDAP

GOOGLE OAUTH2 RADIUS

GOOGLE OAUTH2 SAML

GOOGLE OAUTH2 KEY 528620852399-gm2dt4hr12tsj67fqamk09k1e0ad6gd8.apps.googleusercontent.com

GOOGLE OAUTH2 SECRET q2fMVCmEregbg-drvebPp8OW

The **Google OAuth2 Callback URL** field is already pre-populated and non-editable.

3. Using the credentials Google supplied during the web application setup process:

- Copy and paste Google's Client ID into the **Google OAuth2 Key** field of the Configure Tower - Authentication screen. Look for the value with the same format as the one shown in the text field.
- Copy and paste Google's Client secret into the **Google OAuth2 Secret** field of the Configure Tower - Authentication screen. Look for the value with the same format as the one shown in the text field.

SETTINGS / EDIT CONFIGURATION

CONFIGURE TOWER

AUTHENTICATION JOBS SYSTEM USER INTERFACE

SUB CATEGORY Google OAuth2


GOOGLE OAUTH2 CALLBACK URL https://172.16.1.100:8080/google-oauth2/

GOOGLE OAUTH2 KEY 528620852399-gm2dt4hr12tsj67fqamk09k1e0ad6gd8.apps.googleusercontent.com

GOOGLE OAUTH2 SECRET q2fMVCmEregbg-drvebPp8OW

GOOGLE OAUTH2 WHITELISTED DOMAINS example.com


4. To complete the remaining optional fields, refer to the tooltips in each of the fields for instructions and required format.
5. For details on completing the mapping fields, see *Organization and Team Mapping*.
7. Click **Save** when done.
8. To verify that the authentication was configured correctly, logout of Ansible Tower and the login screen will now display the Google logo to indicate it as a alternate method of logging into Ansible Tower.

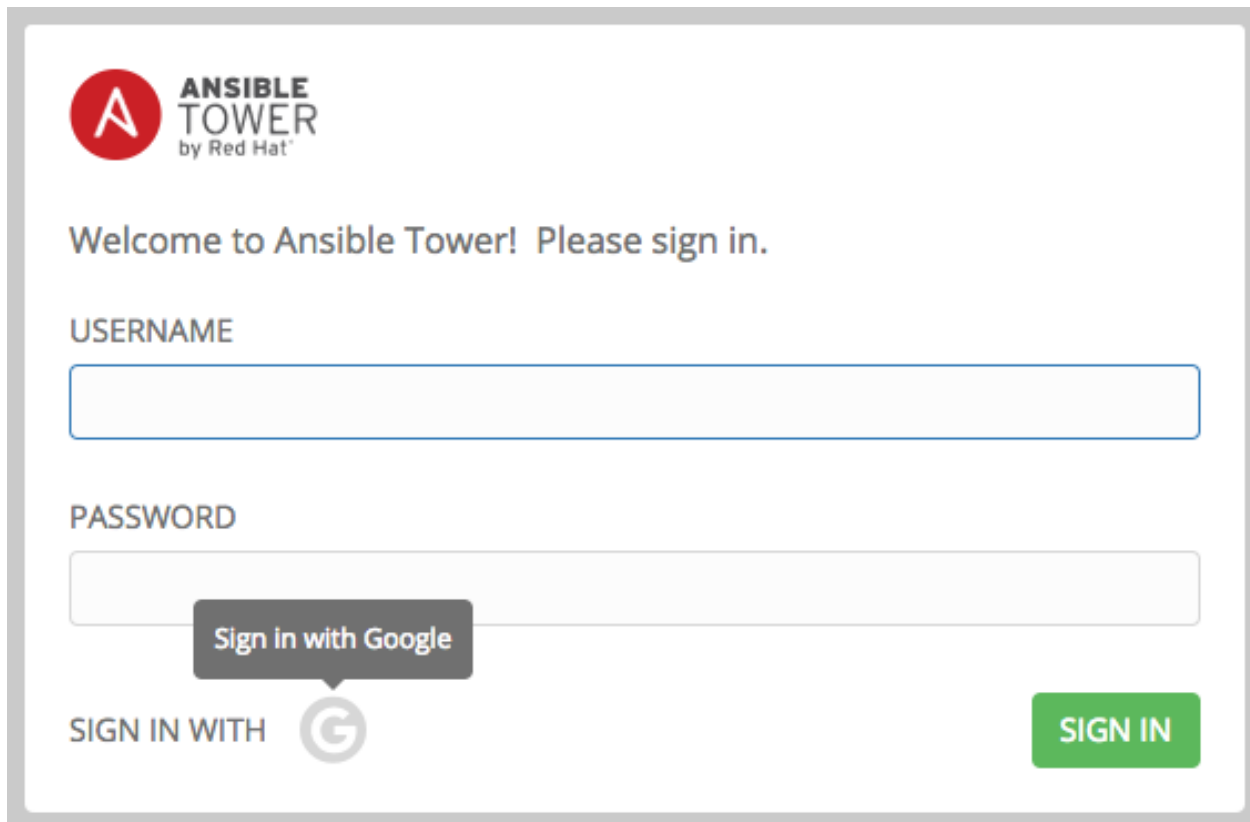

The image shows the Ansible Tower login interface. At the top left is the Ansible Tower logo with the text "by Red Hat". Below the logo, it says "Welcome to Ansible Tower! Please sign in." There are two input fields: "USERNAME" and "PASSWORD". Below the password field is a "Sign in with Google" button with a Google 'G' icon. To the right of the "Sign in with Google" button is a green "SIGN IN" button.

12.2 GitHub OAuth2 Settings


To set up social authentication for GitHub, you will need to obtain an OAuth2 key and secret for a web application. To do this, you must first register the new application with GitHub at <https://github.com/settings/developers>. In order to register the application, you must supply it with your homepage URL, which is the Callback URL shown in the Configure Tower user interface. The OAuth2 key (Client ID) and secret (Client Secret) will be used to supply the required fields in the Ansible Tower User Interface.

1. In the Ansible Tower User Interface, click **Configure Tower** from the Settings () Menu screen.

The Authentication tab displays initially by default.

2. In the Sub Category field, select **GitHub** from the drop-down list.

SETTINGS / EDIT CONFIGURATION

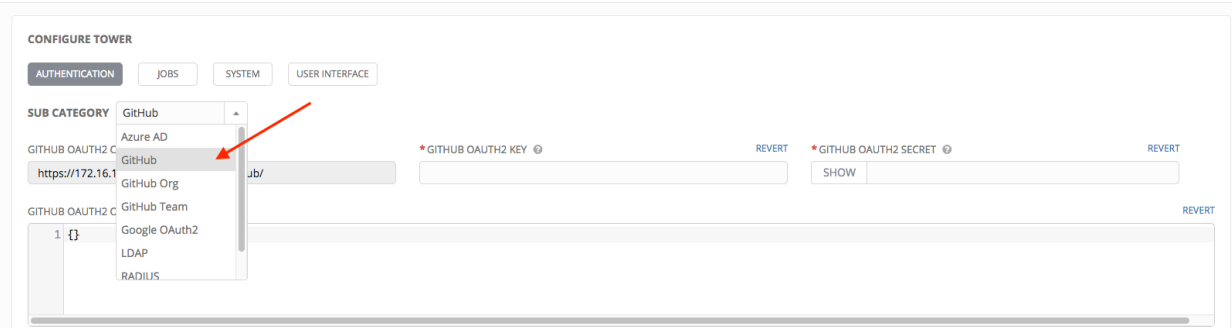

The image shows the "CONFIGURE TOWER" page in the Ansible Tower user interface, specifically the "AUTHENTICATION" tab. The "SUB CATEGORY" dropdown menu is open, showing a list of options: GitHub, Azure AD, GitHub, GitHub Org, GitHub Team, Google OAuth2, LDAP, and RADIIUS. A red arrow points to the "GitHub" option in the dropdown. The "GITHUB OAUTH2 C" field is set to "https://172.16.1". The "GITHUB OAUTH2 KEY" field is empty, and the "GITHUB OAUTH2 SECRET" field is empty. There are "REVERT" buttons for both the key and secret fields. A "SHOW" button is also present next to the secret field.

3. Use the **GitHub OAuth2 Callback URL** to supply GitHub when it prompts for your application's Homepage URL.

SETTINGS / EDIT CONFIGURATION

CONFIGURE TOWER

AUTHENTICATION JOBS SYSTEM USER INTERFACE

SUB CATEGORY GitHub

GITHUB OAUTH2 CALLBACK URL ⓘ https://[redacted]/sso/complete/github/ *GITHUB OAUTH2 KEY ⓘ REVERT *GITHUB OAUTH2 SECRET ⓘ REVERT

GITHUB OAUTH2 SECRET ⓘ SHOW

GITHUB OAUTH2 ORGANIZATION MAP ⓘ REVERT

1 {}

Once the application is registered, GitHub displays the Client ID and Client Secret.

4. Copy and paste GitHub's Client ID into the **GitHub OAuth2 Key** field of the Configure Tower - Authentication screen.
5. Copy and paste GitHub's Client Secret into the **GitHub OAuth2 Secret** field of the Configure Tower - Authentication screen.
6. For details on completing the mapping fields, see *Organization and Team Mapping*.
7. Click **Save** when done.
8. To verify that the authentication was configured correctly, logout of Ansible Tower and the login screen will now display the GitHub logo to allow logging in with those credentials.



The image shows the Ansible Tower login interface. At the top left is the Ansible Tower logo (a red circle with a white 'A') and the text 'ANSIBLE TOWER by Red Hat'. Below the logo, the text 'Welcome to Ansible Tower! Please sign in.' is displayed. Underneath, there are two input fields: 'USERNAME' and 'PASSWORD'. Below the password field, there is a dark grey button with the text 'Sign in with GitHub'. At the bottom left, the text 'SIGN IN WITH' is followed by the GitHub Octocat logo. At the bottom right, there is a green button with the text 'SIGN IN'.


12.2.1 Github Org Settings

When defining account authentication with either an organization or a team within an organization, you should use the specific organization and team settings. Account authentication can be limited by an organization as well as by a team within an organization.

You can also choose to allow all by specifying non-organization or non-team based settings (as shown above).


You can limit users who can login to Tower by limiting only those in an organization or on a team within an organization.

To set up social authentication for a GitHub Organization, you will need to obtain an OAuth2 key and secret for a web application. To do this, you must first register your organization-owned application at <https://github.com/organizations/<yourorg>/settings/applications>. In order to register the application, you must supply it with your Authorization callback URL, which is the Callback URL shown in the Configure Tower user interface. Each key and secret must belong to a unique application and cannot be shared or reused between different authentication backends. The OAuth2 key (Client ID) and secret (Client Secret) will be used to supply the required fields in the Ansible Tower User Interface.

1. In the Ansible Tower User Interface, click **Configure Tower** from the Settings () Menu screen.

The Authentication tab displays initially by default.

2. In the Sub Category field, select **GitHub Org** from the drop-down list.

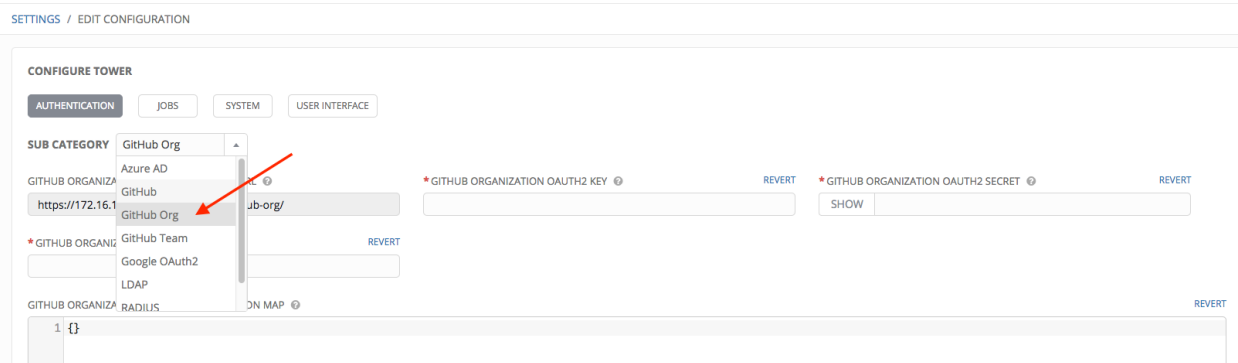

SETTINGS / EDIT CONFIGURATION

CONFIGURE TOWER

AUTHENTICATION JOBS SYSTEM USER INTERFACE

SUB CATEGORY GitHub Org

GITHUB ORGANIZATION OAUTH2 KEY REVERT


GITHUB ORGANIZATION OAUTH2 SECRET REVERT

GITHUB ORGANIZATION OAUTH2 CALLBACK URL

GITHUB ORGANIZATION NAME REVERT

GITHUB ORGANIZATION OAUTH2 ORGANIZATION MAP REVERT

3. Use the **GitHub Organization OAuth2 Callback URL** to supply GitHub when it prompts for the Authorization callback URL.

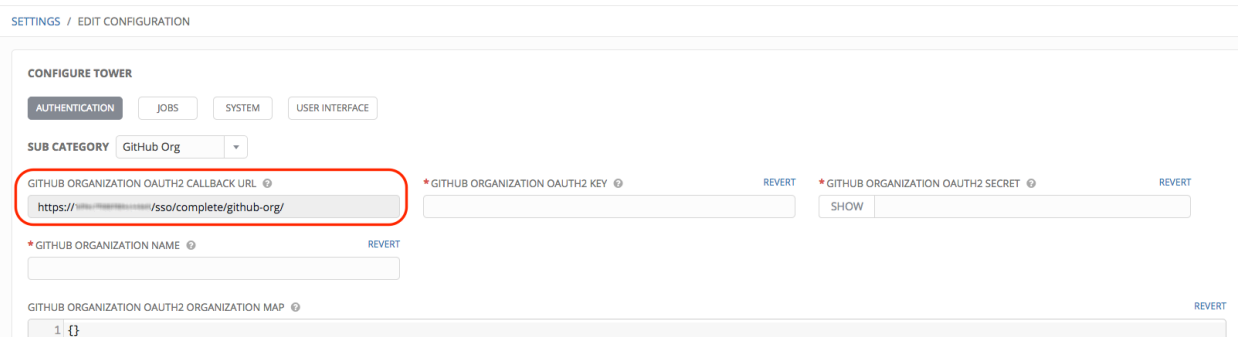

SETTINGS / EDIT CONFIGURATION

CONFIGURE TOWER

AUTHENTICATION JOBS SYSTEM USER INTERFACE

SUB CATEGORY GitHub Org

GITHUB ORGANIZATION OAUTH2 KEY REVERT

GITHUB ORGANIZATION OAUTH2 SECRET REVERT

GITHUB ORGANIZATION OAUTH2 CALLBACK URL

GITHUB ORGANIZATION NAME REVERT

GITHUB ORGANIZATION OAUTH2 ORGANIZATION MAP REVERT

Once the application is registered, GitHub displays the Client ID and Client Secret.

4. Copy and paste GitHub's Client ID into the **GitHub Organization OAuth2 Key** field of the Configure Tower - Authentication screen.

5. Copy and paste GitHub's Client Secret into the **GitHub Organization OAuth2 Secret** field of the Configure Tower - Authentication screen.
6. For details on completing the mapping fields, see *Organization and Team Mapping*.
7. Click **Save** when done.
8. To verify that the authentication was configured correctly, logout of Ansible Tower and the login screen will now display the GitHub Organization logo to allow logging in with those credentials.




The image shows the Ansible Tower login interface. At the top left is the Ansible Tower logo (a red circle with a white 'A') and the text 'ANSIBLE TOWER by Red Hat'. Below the logo, it says 'Welcome to Ansible Tower! Please sign in.' There are two input fields: 'USERNAME' and 'PASSWORD'. A dark grey button with white text 'Sign in with GitHub Organizations' is positioned over the password field. Below the password field, there is a 'SIGN IN WITH' label followed by a GitHub logo. To the right of this is a green 'SIGN IN' button.

12.2.2 Github Team Settings

To set up social authentication for a GitHub Team, you will need to obtain an OAuth2 key and secret for a web application. To do this, you must first register your team-owned application at <https://github.com/organizations/<yourorg>/settings/applications>. In order to register the application, you must supply it with your Authorization callback URL, which is the Callback URL shown in the Configure Tower user interface. Each key and secret must belong to a unique application and cannot be shared or reused between different authentication backends. The OAuth2 key (Client ID) and secret (Client Secret) will be used to supply the required fields in the Ansible Tower User Interface.

1. Find the numeric team ID using the Github API: <http://fabian-kostadinov.github.io/2015/01/16/how-to-find-a-github-team-id/>. The Team ID will be used to supply a required field in the Ansible Tower User Interface.

2. In the Ansible Tower User Interface, click **Configure Tower** from the Settings () Menu screen.

The Authentication tab displays initially by default.


3. In the Sub Category field, select **GitHub Team** from the drop-down list.


SETTINGS / EDIT CONFIGURATION


CONFIGURE TOWER


AUTHENTICATION JOBS SYSTEM USER INTERFACE


SUB CATEGORY GitHub Team

GITHUB TEAM OAUTH2 CALLBACK URL 

* GITHUB TEAM OAUTH2 KEY 
REVERT

* GITHUB TEAM OAUTH2 SECRET 
SHOW REVERT

* GITHUB TEAM ID 
REVERT

GITHUB TEAM OAUTH2 ORGANIZATION MAP 
REVERT

1 { }


4. Use the **GitHub Team OAuth2 Callback URL** to supply GitHub when it prompts for the Authorization callback URL.


SETTINGS / EDIT CONFIGURATION


CONFIGURE TOWER


AUTHENTICATION JOBS SYSTEM USER INTERFACE


SUB CATEGORY GitHub Team

GITHUB TEAM OAUTH2 CALLBACK URL 

* GITHUB TEAM OAUTH2 KEY 
REVERT

* GITHUB TEAM OAUTH2 SECRET 
SHOW REVERT

* GITHUB TEAM ID 
REVERT

GITHUB TEAM OAUTH2 ORGANIZATION MAP 
REVERT

1 { }

Once the application is registered, GitHub displays the Client ID and Client Secret.

5. Copy and paste GitHub's Client ID into the **GitHub Team OAuth2 Key** field of the Configure Tower - Authentication screen.
6. Copy and paste GitHub's Client Secret into the **GitHub Team OAuth2 Secret** field of the Configure Tower - Authentication screen.
7. For details on completing the mapping fields, see *Organization and Team Mapping*.
8. Click **Save** when done.
9. To verify that the authentication was configured correctly, logout of Ansible Tower and the login screen will now display the GitHub Team logo to allow logging in with those credentials.

12.3 Organization and Team Mapping

Next, you will need to control which users are placed into which Tower organizations based on their username and email address (mapping out your organization admins/users from social or enterprise-level authentication accounts).

Dictionary keys are organization names. Organizations will be created, if not already present and if the license allows for multiple organizations. Otherwise, the single default organization is used regardless of the key.

Values are dictionaries defining the options for each organization's membership. For each organization, it is possible to specify which users are automatically users of the organization and also which users can administer the organization.

admins: None, True/False, string or list/tuple of strings.

- If **None**, organization admins will not be updated.
- If **True**, all users using account authentication will automatically be added as admins of the organization.

- If **False**, no account authentication users will be automatically added as admins of the organization.
- If a string or list of strings, specifies the usernames and emails for users who will be added to the organization. Compiled regular expressions may also be used instead of string literals.

remove_admins: True/False. Defaults to **True**.

- When **True**, a user who does not match is removed from the organization's administrative list.

users: None, True/False, string or list/tuple of strings. Same rules apply as for **admins**.

remove_users: True/False. Defaults to **True**. Same rules apply as for **remove_admins**.

```
SOCIAL_AUTH_ORGANIZATION_MAP = {
    "Default": {
        "users": True,
    },
    "Test Org": {
        "admins": ["admin@example.com"],
        "users": True,
    },
    "Test Org 2": {
        "admins": ["admin@example.com", re.compile(r"^tower-[^@]+*?@.*$"),
        "users": re.compile(r"^[^@].*?@example\.com$"),
    },
}
```

Organization mappings may be specified separately for each account authentication backend. If defined, these configurations will take precedence over the global configuration above.

```
SOCIAL_AUTH_GOOGLE_OAUTH2_ORGANIZATION_MAP = {}
SOCIAL_AUTH_GITHUB_ORGANIZATION_MAP = {}
SOCIAL_AUTH_GITHUB_ORG_ORGANIZATION_MAP = {}
SOCIAL_AUTH_GITHUB_TEAM_ORGANIZATION_MAP = {}
SOCIAL_AUTH_SAML_ORGANIZATION_MAP = {}
```

Mapping of team members (users) from social auth accounts. Keys are team names (will be created if not present). Values are dictionaries of options for each team's membership, where each can contain the following parameters:

organization: string. The name of the organization to which the team belongs. The team will be created if the combination of organization and team name does not exist. The organization will first be created if it does not exist. If the license does not allow for multiple organizations, the team will always be assigned to the single default organization.

users: None, True/False, string or list/tuple of strings.

- If **None**, team members will not be updated.
- If **True/False**, all social auth users will be added/removed as team members.
- If a string or list of strings, specifies expressions used to match users. User will be added as a team member if the username or email matches. Compiled regular expressions may also be used instead of string literals.

remove: True/False. Defaults to **True**. When **True**, a user who does not match the rules above is removed from the team.

```
SOCIAL_AUTH_TEAM_MAP = {
    "My Team": {
        "organization": "Test Org",
        "users": ["re.compile(r'^[^@]+*?@test\.example\.com$')"],
        "remove": True,
    },
    "Other Team": {
```

```
"organization": "Test Org 2",
"users": ["re.compile(r'^[@]+?@test\.example\.com$')"],
"remove": False,
},
}
```

Team mappings may be specified separately for each account authentication backend, based on which of these you setup. When defined, these configurations take precedence over the the global configuration above.

```
SOCIAL_AUTH_GOOGLE_OAUTH2_TEAM_MAP = {}
SOCIAL_AUTH_GITHUB_TEAM_MAP = {}
SOCIAL_AUTH_GITHUB_ORG_TEAM_MAP = {}
SOCIAL_AUTH_GITHUB_TEAM_TEAM_MAP = {}
SOCIAL_AUTH_SAML_TEAM_MAP = {}
```

Uncomment the line below (i.e. set `SOCIAL_AUTH_USER_FIELDS` to an empty list) to prevent new user accounts from being created. Only users who have previously logged in to Tower using social or enterprise-level authentication or have a user account with a matching email address will be able to login.

```
SOCIAL_AUTH_USER_FIELDS = []
```

SETTING UP ENTERPRISE AUTHENTICATION


Topics:

- *Azure Active Directory (AD)*
- *SAML Authentication Settings*
- *RADIUS Authentication Settings*

Note: For LDAP authentication, see *Setting up LDAP Authentication*.


13.1 Azure Active Directory (AD)

To set up enterprise authentication for Microsoft Azure Active Directory (AD), you will need to obtain an OAuth2 key and secret by registering your organization-owned application from Azure at <https://auth0.com/docs/connections/enterprise/azure-active-directory>. Each key and secret must belong to a unique application and cannot be shared or reused between different authentication backends. In order to register the application, you must supply it with your webpage URL, which is the Callback URL shown in the Configure Tower user interface.

1. In the Ansible Tower User Interface, click **Configure Tower** from the Settings () Menu screen.

The Authentication tab displays initially by default.

2. In the Sub Category field, select **Azure AD** from the drop-down list.

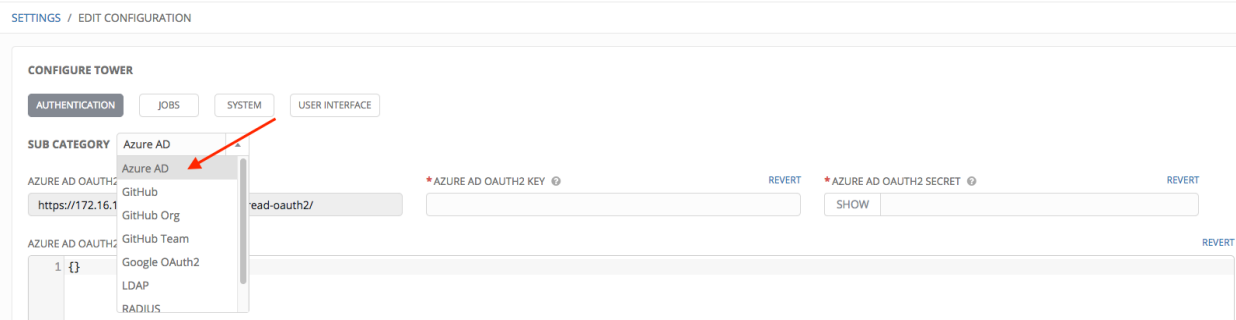

3. Use the **Azure AD OAuth2 Callback URL** to supply Azure AD when it prompts for your application's Sign-on URL.

SETTINGS / EDIT CONFIGURATION

CONFIGURE TOWER

AUTHENTICATION JOBS SYSTEM USER INTERFACE

SUB CATEGORY Azure AD

AZURE AD OAUTH2 CALLBACK URL ⓘ *AZURE AD OAUTH2 KEY ⓘ REVERT *AZURE AD OAUTH2 SECRET ⓘ REVERT

<https://localhost:8080/sso/complete/azuread-oauth2/> SHOW

AZURE AD OAUTH2 ORGANIZATION MAP ⓘ REVERT

1 {}

Once the application is registered, Azure displays the Application ID and Object ID.

- Copy and paste Azure's Application ID to the **Azure AD OAuth2 Key** field of the Configure Tower - Authentication screen.
- Copy and paste Azure's Object ID to the **Azure AD OAuth2 Secret** field of the Configure Tower - Authentication screen.
- For details on completing the mapping fields, see *Organization and Team Mapping*.
- Click **Save** when done.
- To verify that the authentication was configured correctly, logout of Ansible Tower and the login screen will now display the Microsoft Azure logo to allow logging in with those credentials.


The image shows the Ansible Tower login interface. At the top is the Ansible Tower logo with the text 'by Red Hat'. Below it is a welcome message: 'Welcome to Ansible Tower! Please sign in.' There are two input fields: 'USERNAME' and 'PASSWORD'. Below the password field is a button labeled 'Sign in with Azure AD'. At the bottom left, there is a 'SIGN IN WITH' label followed by a Microsoft Azure logo. At the bottom right is a green 'SIGN IN' button.

For application registering basics in Azure AD, refer to: <https://docs.microsoft.com/en-us/azure/active-directory/develop/active-directory-authentication-scenarios#basics-of-registering-an-application-in-azure-ad>


13.2 SAML Authentication Settings

Note: SAML authentication is a feature specific to Enterprise-level license holders.

SAML allows the exchange of authentication and authorization data between an Identity Provider (IdP - a system of servers that provide the Single Sign On service) and a Service Provider (in this case, Ansible Tower).

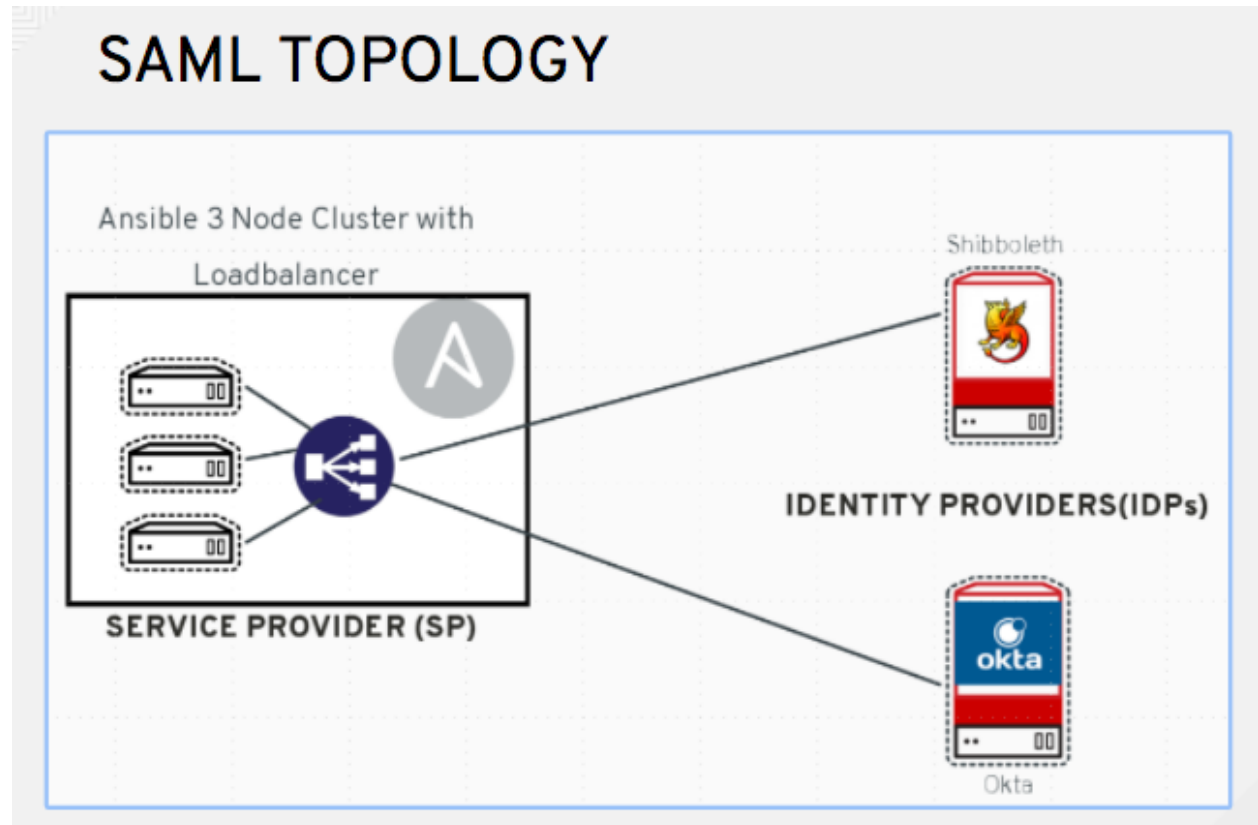

To setup SAML authentication:

1. In the Ansible Tower User Interface, click **Configure Tower** from the Settings () Menu screen.

The Authentication tab displays initially by default.

2. In the Sub Category field, select **SAML** from the drop-down list.

SETTINGS / EDIT CONFIGURATION

CONFIGURE TOWER

AUTHENTICATION | JOBS | SYSTEM | USER INTERFACE

SUB CATEGORY: SAML

SAML SERVICE PROVIDER: GitHub Org

SAML SERVICE PROVIDER: GitHub Team

SAML SERVICE PROVIDER: Google OAuth2

SAML SERVICE PROVIDER: LDAP

SAML SERVICE PROVIDER: RADIUS


SAML SERVICE PROVIDER: SAML

SAML SERVICE PROVIDER METADATA URL: <https://.../sso/metadata/saml/>

SAML SERVICE PROVIDER ENTITY ID: [REVERT](#)


SAML SERVICE PROVIDER PRIVATE KEY: [REVERT](#)

The **SAML Service Provider Callback URL** and **SAML Service Provider Metadata URL** fields are pre-populated and are non-editable.

- Set the **SAML Service Provider Entity ID** to be the same as the Tower Base URL. The Tower Base URL can be found in the **System** tab of the Configure Tower screen, which you can access through the  menu. Through the API, it can be viewed in the `/api/v1/settings/system`, under the `TOWER_BASE_URL` variable. The Entity ID can be set to any one of the individual Tower Cluster Nodes, but it is good practice to set it to the URL of the Service Provider.

Note: The Tower Base URL is different for each node in a cluster. Commonly, a load balancer will sit in front of many tower cluster nodes to provide a single entry point, Tower Cluster FQDN. The SAML Service Provider must be able establish an outbound connection and route to the Tower Cluster Node or Tower Cluster FQDN set in the SAML Service Provider Entity ID.

In this example, the Service Provider is the Tower Cluster, and therefore, the ID is set to the Tower Cluster FQDN.

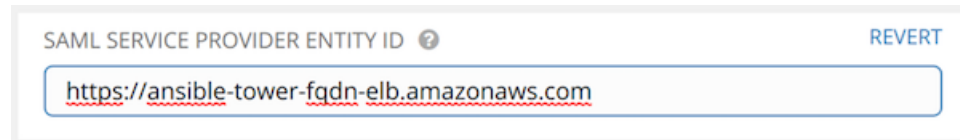

- Create a server certificate for the Ansible cluster. Typically when an Ansible cluster is configured, the Tower nodes will be configured to handle HTTP traffic only and the load balancer will be an SSL Termination Point. In this case, an SSL certificate is required for the load balancer, and not for the individual Tower Cluster Nodes. SSL can either be enabled or disabled per individual Tower node, but should be disabled when using an SSL terminated load balancer. It is recommended to use a non-expiring self signed certificate to avoid periodically updating certificates. This way, authentication will not fail in case someone forgets to update the certificate.



As an example for public certs:

```
-----BEGIN CERTIFICATE-----
... cert text ...
-----END CERTIFICATE-----
```

- Create an optional private key for Tower to use as a service provider (SP) and enter it in the **SAML Service Provider Private Key** field.

As an example for private keys:

```
-----BEGIN PRIVATE KEY--
... key text ...
-----END PRIVATE KEY-----
```

- Contact the Identity Provider administrator and provide the following information:

- SAML Assertion Consumer Services URL. This is the Tower Callback URL auto-generated by Tower and is shown in the **SAML Service Provider Callback URL** field. Ensure that the Base URL matches the FQDN of the load balancer (if used).
 - Service Provider Entity ID. This is the URL entered in the **SAML Service Provider Entity ID** field.
7. Optionally provide the IdP with some details about the Tower cluster during the SSO process in the **SAML Service Provider Organization Info** field.

```
{
  "en-US": {
    "url": "http://www.example.com",
    "displayname": "Example",
    "name": "example"
  }
}
```

For example:



SAML SERVICE PROVIDER ORGANIZATION INFO ?

```
1 {
2   "en-US": {
3     "url": "https://ansible-tower-fqdn-elb.amazonaws.com",
4     "displayname": "Ansible Tower Cluster",
5     "name": "ansible-tower-cluster"
6   }
7 }
```

8. Provide the IdP with the technical contact information in the **SAML Service Provider Technical Contact** field. Do not remove the contents of this field.

```
{
  "givenName": "Some User",
  "emailAddress": "suser@example.com"
}
```

For example:



SAML SERVICE PROVIDER TECHNICAL CONTACT ?

```
1 {
2   "givenName": "Central IT",
3   "emailAddress": "central-it@company.com"
4 }
```

9. Provide the IdP with the support contact information in the **SAML Service Provider Support Contact** field. Do not remove the contents of this field.

```
{
  "givenName": "Some User",
  "emailAddress": "suser@example.com"
}
```

For example:



10. In the **SAML Enabled Identity Providers** field, provide information on how to connect to each Identity Provider listed. Tower expects the following SAML attributes in the example below:

```

Username (urn:oid:0.9.2342.19200300.100.1.1)
Email (urn:oid:0.9.2342.19200300.100.1.3)
FirstName (urn:oid:2.5.4.42)
LastName (urn:oid:2.5.4.4)

```

If these attributes are not known, map existing SAML attributes to lastname, firstname, email and username.

Configure the required keys for each IDP:

- `attr_user_permanent_id` - the unique identifier for the user. It can be configured to match any of the attribute sent from the IDP. Usually, it is set to `name_id` if `SAML:nameid` attribute is sent to the Tower node or it can be the username attribute, or a custom unique identifier.
- `entity_id` - the Entity ID provided by the Identity Provider administrator. The admin creates a SAML profile for Tower and it generates a unique URL.
- `url` - the Single Sign On (SSO) URL Tower redirects the user to, when SSO is activated.
- `x509_cert` - the certificate provided by the IDP admin generated from the SAML profile created on the Identity Provider. Remove the `--BEGIN CERTIFICATE--` and `--END CERTIFICATE--` headers, then enter the cert as one non-breaking string.

Multiple SAML IdPs are supported. Some IdPs may provide user data using attribute names that differ from the default OIDs (<https://github.com/omab/python-social-auth/blob/master/social/backends/saml.py>). The SAML NameID is a special attribute used by some Identity Providers to tell the Service Provider (Tower cluster) what the unique user identifier is. If it is used, set the `attr_user_permanent_id` to `name_id` as shown in the example. Other attribute names may be overridden for each IdP as shown below.

```

{
  "myidp": {
    "entity_id": "https://idp.example.com",
    "url": "https://myidp.example.com/sso",
    "x509cert": ""
  },
  "onelogin": {
    "entity_id": "https://app.onelogin.com/saml/metadata/123456",
    "url": "https://example.onelogin.com/trust/saml2/http-post/sso/123456",
    "x509cert": "",
    "attr_user_permanent_id": "name_id",
    "attr_first_name": "User.FirstName",
    "attr_last_name": "User.LastName",
    "attr_username": "User.email",
    "attr_email": "User.email"
  }
}

```

```

SAML ENABLED IDENTITY PROVIDERS © REVERT
1 {
2   "myidp": {
3     "entity_id": "https://idp.example.com",
4     "url": "https://myidp.example.com/sso",
5     "x509cert": "MIIEJjCCAwGgAwIBAgIUfU5D540PSBhdDh3gZorvrIaoAwDQYJKoZIhvcNAQEFnBQAwXTElUEBHMCMVxMxjAUBgNVBAoMDUJuc21ibGUsIEluYy4xFTATBgNVnBAsMDE9uZUxvZ21uIElkUDEPMB0GA
6   },
7   "onelogin": {
8     "entity_id": "https://app.onelogin.com/saml/metadata/123456",
9     "url": "https://example.onelogin.com/trust/saml2/http-post/sso/123456",
10    "x509cert": "MIIEJjCCAwGgAwIBAgIUfU5D540PSBhdDh3gZorvrIaoAwDQYJKoZIhvcNAQEFnBQAwXTElUEBHMCMVxMxjAUBgNVBAoMDUJuc21ibGUsIEluYy4xFTATBgNVnBAsMDE9uZUxvZ21uIElkUDEPMB0GA
11    "attr_user_permanent_id": "name_id",
12    "attr_first_name": "User.FirstName",
13    "attr_last_name": "User.LastName",
14    "attr_username": "User.email",
15    "attr_email": "User.email"
16  }
17 }

```

Note: The IdP provides the email, last name and firstname using the well known SAML urn. The IdP uses a custom SAML attribute to identify a user, which is an attribute that Tower is unable to read. Instead, Tower can understand the unique identifier name, which is the URN. Use the URN listed in the SAML “Name” attribute for the user attributes as shown in the example below.


```

SOCIAL_AUTH_SAML_ENABLED_IDPS: {
  "myidp": {
    "entity_id": "http://www.okta.com/exkaxvfm3m8SCKPTG0h7",
    "x509cert": "MIIDpDCCAoygAwIBAgIGAVyqE/WRMA0GCSQ...[its a long string]",
    "url": "https://dev-643645.oktapreview.com/app/redhatdevtest_1/exkaxh7/sso/saml",
    "attr_user_permanent_id": "urn:oid:1.3.6.1.4.1.5555.610.2.2.1.11",
    "attr_username": "urn:oid:1.3.6.1.4.1.5555.610.2.2.1.11"
  }
}

```

11. For details on completing the mapping fields, see *Organization and Team Mapping*.
12. Click **Save** when done.
13. To verify that the authentication was configured correctly, load the auto-generated URL found in the **SAML Service Provider Metadata URL** into a browser. It should output XML output, otherwise, it is not configured correctly.

Alternatively, logout of Ansible Tower and the login screen will now display the SAML logo to indicate it as a alternate method of logging into Ansible Tower.




The image shows the Ansible Tower login interface. At the top is the Ansible Tower logo with the text "by Red Hat". Below the logo is the message "Welcome to Ansible Tower! Please sign in." There are two input fields: "USERNAME" and "PASSWORD". A "Sign in with SAML (onelogin)" button is positioned over the password field. Below the password field is a "SIGN IN WITH" label followed by a SAML icon (a circle with an 'S'). To the right of the password field is a green "SIGN IN" button.

13.3 RADIUS Authentication Settings


Note: RADIUS account authentication is a feature specific to Enterprise-level license holders.

Ansible Tower can be configured to centrally use RADIUS as a source for authentication information.

1. In the Ansible Tower User Interface, click **Configure Tower** from the Settings () Menu screen.

The Authentication tab displays initially by default.

2. In the Sub Category field, select **Radius** from the drop-down list.

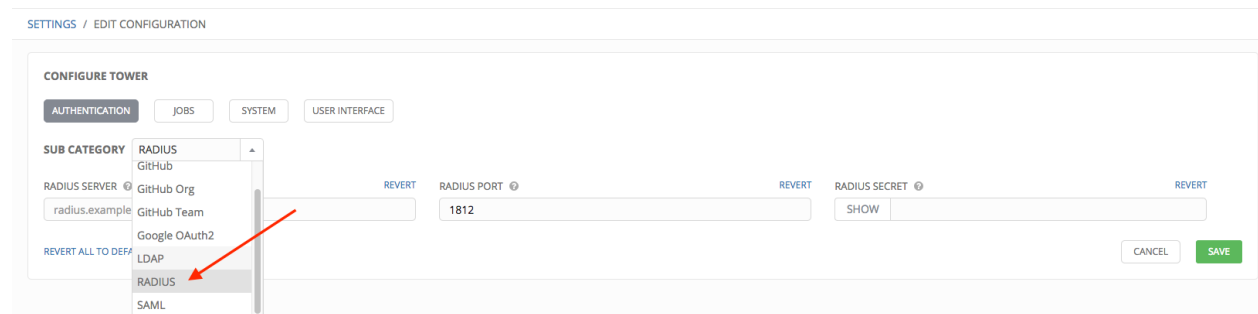

The image shows the "CONFIGURE TOWER" interface in the Ansible Tower UI. The "AUTHENTICATION" tab is selected. Under "SUB CATEGORY", a dropdown menu is open, showing options: RADIUS, GitHub, GitHub Org, GitHub Team, Google OAuth2, LDAP, and RADIUS (highlighted with a red arrow). The "RADIUS SERVER" field contains "radius.example" and has a "REVERT" button. The "RADIUS PORT" field contains "1812" and has a "REVERT" button. The "RADIUS SECRET" field has a "SHOW" button and a "REVERT" button. At the bottom right are "CANCEL" and "SAVE" buttons.

3. Enter the Host or IP of the Radius server in the **Radius Server** field. If this field is left blank, Radius authentication is disabled.
4. Enter the port and secret information in the next two fields.

SETTINGS / EDIT CONFIGURATION

CONFIGURE TOWER

AUTHENTICATIONJOBSSYSTEMUSER INTERFACE

SUB CATEGORY RADIUS ▾

RADIUS SERVER ⓘ
radius.example.com

REVERT

RADIUS PORT ⓘ
1812

REVERT

RADIUS SECRET ⓘ
SHOW

REVERT

REVERT ALL TO DEFAULT

CANCELSAVE

5. Click **Save** when done.

SETTING UP LDAP AUTHENTICATION

Note: LDAP authentication is a feature specific to Enterprise-level license holders. You must have an active enterprise license before beginning the configuration process.

Administrators use LDAP as a source for account authentication information for Tower users. User authentication is provided, but not the synchronization of user permissions and credentials. Organization membership (as well as the organization admin) and team memberships can be synchronized.

When so configured, a user who logs in with an LDAP username and password automatically gets a Tower account created for them and they can be automatically placed into organizations as either regular users or organization administrators.

Users created via an LDAP login cannot change their username, first name, last name, or set a local password for themselves. This is also tunable to restrict editing of other field names.


To configure LDAP integration for Tower:

1. First, create a user in LDAP that has access to read the entire LDAP structure.
2. Test if you can make successful queries to the LDAP server, use the `ldapsearch` command, which is a command line tool that can be installed on the tower system's command line as well as on other Linux and OSX systems. Use the following command to query the ldap server, where *josie* and *Josie4Cloud* are replaced by attributes that work for your setup:

```
ldapsearch -x -H ldap://win -D "CN=josie,CN=Users,DC=website,DC=com" -b "dc=website,  
↪dc=com" -w Josie4Cloud
```

Here `CN=josie,CN=users,DC=website,DC=com` is the Distinguished Name of the connecting user.

Note: The `ldapsearch` utility is not automatically pre-installed with Ansible Tower, however, you can install it from the `openldap-clients` package.

3. In the Ansible Tower User Interface, click **Configure Tower** from the Settings () Menu screen.

The Authentication tab displays initially by default.

4. In the Sub Category field, select **LDAP** from the drop-down list.

SETTINGS / EDIT CONFIGURATION

CONFIGURE TOWER

AUTHENTICATION | JOBS | SYSTEM | USER INTERFACE

SUB CATEGORY

- LDAP
- GitHub
- GitHub Org
- GitHub Team
- Google OAuth2
- LDAP**
- OU=Users,DC=example,DC=com
- SCOPE_SUBTREE
- RADIUS
- SAML

LDAP SERVER URI REVERT

LDAP BIND DN REVERT

LDAP BIND PASSWORD SHOW

LDAP USER SEARCH REVERT

LDAP USER DN TEMPLATE REVERT

LDAP GROUP SEARCH REVERT

SCOPE_SUBTREE

5. Enter the LDAP server address to connect to in the **LDAP Server URI** field using the same format as the one shown in the text field. Below is an example:

LDAP SERVER URI ? REVERT

6. Enter the Distinguished Name in the **LDAP Bind DN** text field to specify the user that Tower uses to connect (Bind) to the LDAP server. Below uses the example, CN=josie, CN=users, DC=website, DC=com:

LDAP BIND DN ? REVERT

7. Enter the password to use for the Binding user in the **LDAP Bind Password** text field. In this example, the password is 'passme':

LDAP BIND PASSWORD ?

SHOW

8. Enter where to search for users while authenticating in the **LDAP USER SEARCH** field using the same format as the one shown in the text field. In this example, use:


```
[
"OU=Users,DC=website,DC=com",
"SCOPE_SUBTREE",
"(cn=%(user)s)"
]
```

The first line specifies where to search for users in the LDAP tree. In the above example, the users are searched recursively starting from DC=website, DC=com.

The second line specifies the scope where the users should be searched:

- **SCOPE_BASE**: This value is used to indicate searching only the entry at the base DN, resulting in only that entry being returned
- **SCOPE_ONELEVEL**: This value is used to indicate searching all entries one level under the base DN - but not including the base DN and not including any entries under that one level under the base DN.
- **SCOPE_SUBTREE**: This value is used to indicate searching of all entries at all levels under and including the specified base DN.

The third line specifies the key name where the user name is stored.

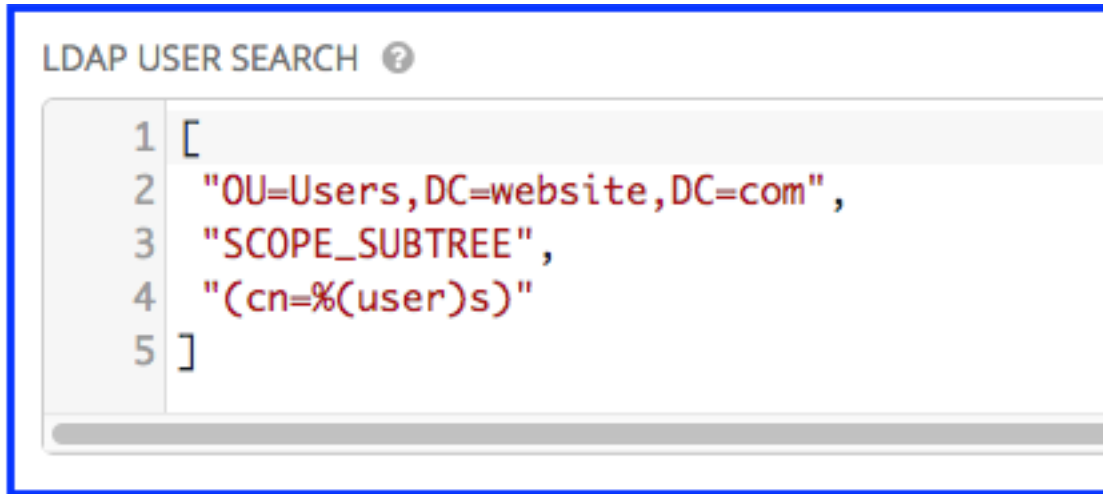

Note: For multiple search queries, the proper syntax is:

```
[
  [
    "OU=Users,DC=northamerica,DC=acme,DC=com",
    "SCOPE_SUBTREE",
    "(sAMAccountName=%(user)s)"
  ],
  [
    "OU=Users,DC=apac,DC=corp,DC=com",
    "SCOPE_SUBTREE",
    "(sAMAccountName=%(user)s)"
  ],
  [
    "OU=Users,DC=emea,DC=corp,DC=com",
    "SCOPE_SUBTREE",
    "(sAMAccountName=%(user)s)"
  ]
]
```


- If that name is stored in key `sAMAccountName`, the **LDAP User DN Template** populates with `(sAMAccountName=%(user)s)`. Similarly, for OpenLDAP, the key is `uid`—hence the line becomes `(uid=%(user)s)`.
- In the **LDAP Group Search** text field, specify which groups should be searched and how to search them. In this example, use:

```
[
  "dc=example,dc=com",
```




```
"SCOPE_SUBTREE",
"(objectClass=group)"
]
```

- The first line specifies the BASE DN where the groups should be searched.
- The second lines specifies the scope and is the same as that for the user directive.
- The third line specifies what the `objectclass` of a group object is in the LDAP you are using.

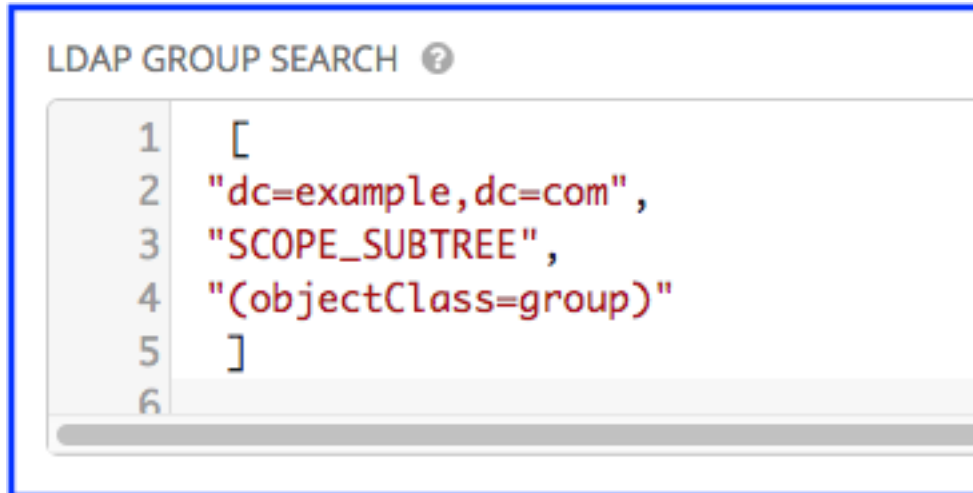

11. Click to select a group type from the **LDAP Group Type** drop-down menu list.
12. Enter the group distinguish name to allow users within that group to access Tower in the **LDAP Require Group** field, using the same format as the one shown in the text field. In this example, use: `CN=Tower Users, OU=Users, DC=website, DC=com`

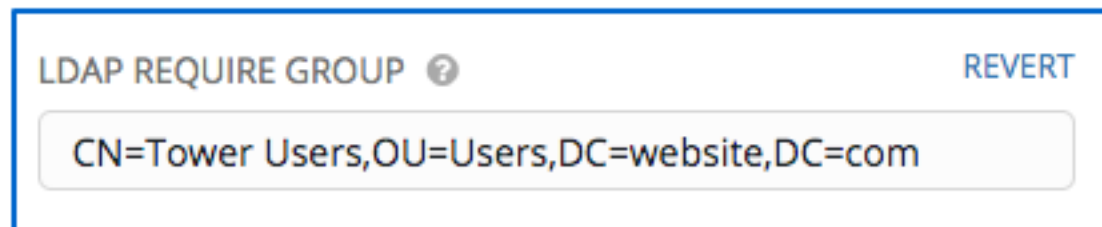

13. Enter the group distinguish name to prevent users within that group to access Tower in the **LDAP Deny Group** field, using the same format as the one shown in the text field. In this example, leave the field blank.
14. The **LDAP Start TLS** is disabled by default. To enable TLS when the LDAP connection is not using SSL, click the toggle to **ON**.



15. Enter the user attributes in the **LDAP User Attribute Map** the text field. In this example, use:

```
[
  "first_name": "givenName",
  "last_name": "sn",
  "email": "mail"
]
```

The above example retrieves users by last name from the key `sn`. You can use the same LDAP query for the user to figure out what keys they are stored under.

16. Enter the user profile flags in the **LDAP User Flags by Group** the text field. In this example, use:

```
{
  "is_superuser": "cn=superusers,ou=groups,dc=website,dc=com"
}
```

The above example retrieves users who are flagged as superusers in their profile.

17. For details on completing the mapping fields, see *LDAP Organization and Team Mapping*.

18. Click **Save** when done.

With these values entered on this form, you can now make a successful authentication with LDAP.

Note: Tower does not actively sync users, but they are created during their initial login.

14.1 Referrals

Active Directory uses “referrals” in case the queried object is not available in its database. It has been noted that this does not work properly with the django LDAP client and, most of the time, it helps to disable referrals. Disable LDAP referrals by adding the following lines to your `/etc/tower/conf.d/ldap.py` file:

```
AUTH_LDAP_GLOBAL_OPTIONS = {
    ldap.OPT_REFERRALS: False,
}
```

Note: “Referrals” are disabled by default in Ansible Tower version 2.4.3 and above. If you are running an earlier version of Tower, you should consider adding this parameter to your configuration file.

For details on completing the mapping fields, see *LDAP Organization and Team Mapping*.

14.2 Enabling Logging for LDAP

To enable logging for LDAP, you must set the level to `DEBUG` in the LDAP configuration file, `/etc/tower/conf.d/ldap.py`:

```
LOGGING['handlers']['tower_warnings']['level'] = 'DEBUG'
```

14.3 LDAP Organization and Team Mapping

Next, you will need to control which users are placed into which Tower organizations based on their username and email address (mapping out between your organization admins/users and LDAP groups).

Keys are organization names. Organizations will be created if not present. Values are dictionaries defining the options for each organization's membership. For each organization, it is possible to specify what groups are automatically users of the organization and also what groups can administer the organization.

admins: `None`, `True/False`, string or list/tuple of strings.

- If **None**, organization admins will not be updated based on LDAP values.
- If **True**, all users in LDAP will automatically be added as admins of the organization.
- If **False**, no LDAP users will be automatically added as admins of the organization.
- If a string or list of strings, specifies the group DN(s) that will be added of the organization if they match any of the specified groups.

remove_admins: `True/False`. Defaults to **False**.

- When **True**, a user who is not a member of the given groups will be removed from the organization's administrative list.

users: `None`, `True/False`, string or list/tuple of strings. Same rules apply as for **admins**.

remove_users: `True/False`. Defaults to **False**. Same rules apply as **remove_admins**.

```
{
  "LDAP Organization": {
    "admins": "cn=engineering_admins,ou=groups,dc=example,dc=com",
    "remove_admins": false,
    "users": [
      "cn=engineering,ou=groups,dc=example,dc=com",
      "cn=sales,ou=groups,dc=example,dc=com",
      "cn=it,ou=groups,dc=example,dc=com"
    ],
    "remove_users": false
  },
  "LDAP Organization 2": {
    "admins": [
      "cn=Administrators,cn=Builtin,dc=example,dc=com"
    ],
    "remove_admins": false,
    "users": true,
    "remove_users": false
  }
}
```

Mapping between team members (users) and LDAP groups. Keys are team names (will be created if not present). Values are dictionaries of options for each team's membership, where each can contain the following parameters:

organization: string. The name of the organization to which the team belongs. The team will be created if the combination of organization and team name does not exist. The organization will first be created if it does not exist.

users: None, True/False, string or list/tuple of strings.

- If **None**, team members will not be updated.
- If **True/False**, all LDAP users will be added/removed as team members.
- If a string or list of strings, specifies the group DN(s). User will be added as a team member if the user is a member of ANY of these groups.

remove: True/False. Defaults to **False**. When **True**, a user who is not a member of the given groups will be removed from the team.

```
{
  "LDAP Engineering": {
    "organization": "LDAP Organization",
    "users": "cn=engineering,ou=groups,dc=example,dc=com",
    "remove": true
  },
  "LDAP IT": {
    "organization": "LDAP Organization",
    "users": "cn=it,ou=groups,dc=example,dc=com",
    "remove": true
  },
  "LDAP Sales": {
    "organization": "LDAP Organization",
    "users": "cn=sales,ou=groups,dc=example,dc=com",
    "remove": true
  }
}
```

CHANGING THE DEFAULT TIMEOUT FOR AUTHENTICATION

Introduced in Ansible Tower 2.4 is a feature which adds an `Auth-Token-Timeout` to every response that includes a valid user-supplied token. The value of `Auth-Token-Timeout` is determined by the configuration (time expressed in seconds) of the `AUTH_TOKEN_EXPIRATION`.

The value of `Auth-Token-Timeout` indicates the length of time, in seconds, that the supplied token is valid, from the moment the request was initiated.

Create an API settings file (`/etc/tower/conf.d/session.py`) with the appropriately defined time variable:

```
AUTH_TOKEN_EXPIRATION = <seconds> # default 1800
```

Create a `local_settings.json` file in `/var/lib/awx/public/static/local_settings.json` with any necessary settings.

The change from using a `local_config.js` file, which would overwrite all settings in the `config.js` file, to using a `local_settings.json` file, which only overwrites specific settings in the `config.js` file, was introduced in Ansible Tower version 2.4.

Note: When including a `local_settings.json` file with specifically configured variables, it will overwrite specific settings in the `config.js` file.

Tower is designed to look for the `config.js` file first, ensuring all preset configuration properties are set properly. Once loaded, Tower looks for a file called `local_settings.json` and checks to see which, if any, settings it should overwrite from `config.js`. Users can now specify only the properties they want to change.

Note: If you are using the `local_settings.js` file to configure some of your settings for the UI, you must switch to using the new `local_settings.json` file. If you do not, your Tower instance will be loaded with the default settings. Custom settings will not appear until you switch to using the new `local_settings.json` file.

For example, to turn the console debugger on, `local_settings.json` could contain the following object (no additional variables are needed):

```
{ "debug_mode" : true}
```

The variables you can use within the `local_settings.json` file are as follows:

- `tooltip_delay`: {show: 500, hide: 100} – Default number of milliseconds to delay displaying/hiding tooltips
- `debug_mode`: false – Enable console logging messages
- `password_length`: 8 – Minimum user password length. Set to 0 to not set a limit

- `password_hasLowercase:` `true` – Requires a lowercase letter in the password
- `password_hasUppercase:` `false` – Requires an uppercase letter in the password
- `password_hasNumber:` `true` – Requires a number in the password
- `password_hasSymbol:` `false` – Requires one of these symbols to be in the password: - `!$%^&*()_+|~='{}[]:"';'<>?,./`
- `variable_edit_modes:` `{yaml, json}` – Options passed to ControlMirror for editing YAML/JSON variables (see below)

```
variable_edit_modes: {
  yaml: {
    mode: "text/x-yaml",
    matchBrackets: true,
    autoCloseBrackets: true,
    styleActiveLine: true,
    lineNumbers: true,
    gutters: ["CodeMirror-lint-markers"],
    lint: true
  },
  json: {
    mode: "application/json",
    styleActiveLine: true,
    matchBrackets: true,
    autoCloseBrackets: true,
    lineNumbers: true,
    gutters: ["CodeMirror-lint-markers"],
    lint: true
  }
}
```

Note: If you are accessing Tower directly and are having trouble getting your authentication to stay, in that you have to keep logging in over and over, try clearing your web browser's cache. In situations like this, it is often found that the authentication token has been cached in the browser session and must be cleared.

USER AUTHENTICATION WITH KERBEROS

User authentication via Active Directory (AD), also referred to as authentication through Kerberos, is supported through Ansible Tower.

To get started, first setup the Kerberos packages in the Tower system so that you can successfully generate a Kerberos ticket. To install the packages, use the following steps:

```
yum install krb5-workstation
yum install krb5-devel
yum install krb5-libs
pip install kerberos
```

Once installed, edit the `/etc/krb.conf` file, as follows, to provide the address of the AD, the domain, etc.:

```
[logging]
default = FILE:/var/log/krb5libs.log
kdc = FILE:/var/log/krb5kdc.log
admin_server = FILE:/var/log/kadmind.log

[libdefaults]
default_realm = WEBSITE.COM
dns_lookup_realm = false
dns_lookup_kdc = false
ticket_lifetime = 24h
renew_lifetime = 7d
forwardable = true

[realms]
WEBSITE.COM = {
    kdc = WIN-SA2TXZOTVMV.website.com
    admin_server = WIN-SA2TXZOTVMV.website.com
}

[domain_realm]
.website.com = WEBSITE.COM
website.com = WEBSITE.COM
```

After the configuration file has been updated, you should be able to successfully authenticate and get a valid token. The following steps show how to authenticate and get a token:

```
[root@ip-172-31-26-180 ~]# kinit username
Password for username@WEBSITE.COM:
[root@ip-172-31-26-180 ~]#

Check if we got a valid ticket.
```

```
[root@ip-172-31-26-180 ~]# klist
Ticket cache: FILE:/tmp/krb5cc_0
Default principal: username@WEBSITE.COM

Valid starting      Expires            Service principal
01/25/16 11:42:56  01/25/16 21:42:53  krbtgt/WEBSITE.COM@WEBSITE.COM
    renew until 02/01/16 11:42:56
[root@ip-172-31-26-180 ~]#
```

Once you have a valid ticket, you can check to ensure that everything is working as expected from command line. To test this, make sure that your inventory looks like the following:

```
[windows]
win01.WEBSITE.COM

[windows:vars]
ansible_user = username@WEBSITE.COM
ansible_connection = winrm
ansible_port = 5986
```

You should also: - Ensure that the hostname is the proper client hostname matching the entry in AD and is not the IP address. - In the username declaration, ensure that the domain name (the text after @) is properly entered with regard to upper- and lower-case letters, as Kerberos is case sensitive. For Tower, you should also ensure that the inventory looks the same.

Note: If you encounter a `Server not found in Kerberos database` error message, and your inventory is configured using FQDNs (**not IP addresses**), ensure that the service principal name is not missing or mis-configured.

Now, running a playbook should run as expected. You can test this by running the playbook as the `awx` user.

Once you have verified that playbooks work properly, integration with Tower is easy. Generate the Kerberos ticket as the `awx` user and Tower should automatically pick up the generated ticket for authentication.

Note: The `python kerberos` package must be installed. Ansible is designed to check if `kerberos` package is installed and, if so, it uses `kerberos` authentication.

16.1 AD and Kerberos Credentials

Active Directory only:

- If you are only planning to run playbooks against Windows machines with AD usernames and passwords as machine credentials, you can use “`user@domain`” format for the username and an associated password.

With Kerberos:

- If Kerberos is installed, the password is unnecessary and the field can be left blank. Instead, you must `kinit` a ticket at the commandline as the `awx` user and have all the other inventory variables specified at the group level.

Kerberos needs the ticket created from `kinit` for authentication. Do not do this as the root user. Change to the `awx` user before you perform the `kinit`.

16.2 Working with Kerberos Tickets

Kerberos tickets are generated every 24 hours, as the default lifetime of a ticket is 24 hours. If you need to change this, edit the `/etc/krb.conf` file.

Another approach is to use `cron` to `kinit` the process every 24 hours. To automate this, you must generate a keytab file which stores the user password so that `kinit` will not prompt for the user password. Use the following steps to generate this keytab file and then get the kerberos ticket:

```
> ktutil
  ktutil: addent -password -p username@WEBSITE.COM -k 1 -e aes256-cts-hmac-sha1-96
  provide password
  ktutil: wkt username.keytab
  ktutil: quit
```

Now, add the following command to `cron`:

```
kinit username@WEBSITE.COM -k -t username.keytab
```

Note: Make sure the system time is in sync between AD, Tower, and the clients.

Note: Client hostnames can be looked up via DNS, both normally and reversed.

WORKING WITH SESSION LIMITS

Setting a session limit allows administrators to limit the number of simultaneous sessions per user or per IP address.

In Ansible Tower, a session is created for each browser that a user uses to log in, which forces the user to log out any extra sessions after they exceed the administrator-defined maximum.

Session limits may be important, depending on your particular setup. For example, perhaps you only want a single user on your system with a single login per device (where the user could log in on his work laptop, phone, or home computer). In such a case, you would want to create a session limit equal to 1 (one). If the user logs in on his laptop, for example, then logs in using his phone, his laptop session expires (times out) and only the login on the phone persists.

While session counts can be very limited, they can also be expanded to cover as many session logins as are needed by your organization.

When a user logs in and their login results in other users being logged out, the session limit has been reached and those users who are logged out are notified as to why the logout occurred.

To make changes to your session limits, navigate to `/etc/tower/conf.d` and edit the `sessions.py` file or use the [Browsable API](#) if you are comfortable with making REST requests. The settings you should change are detailed below:

```
# Seconds before auth tokens expire.
AUTH_TOKEN_EXPIRATION = 1800

# Maximum number of per-user valid, concurrent tokens.
# -1 is unlimited
AUTH_TOKEN_PER_USER = -1

# Enable / Disable HTTP Basic Authentication used in the API browser
# Note: Session limits are not enforced when using HTTP Basic Authentication.
AUTH_BASIC_ENABLED = True
```

Note: To make the best use of session limits, disable `AUTH_BASIC_ENABLED` by changing the value to `False`, as it falls outside of the scope of session limit enforcement.

Caution: Proactive session limits will kick the user out when the session is idle. It is strongly recommended that you do not set the session limit to anything less than 1 minute, as doing so will break your Ansible Tower instance.

BACKING UP AND RESTORING TOWER

The ability to backup and restore your system(s) has been integrated into the Tower setup playbook, making it easy for you to backup and replicate your Tower instance as needed.

Note: When restoring, be sure to restore to the same version from which it was backed up. However, you should always use the most recent minor version of a release to backup and/or restore your Tower installation version. For example, if the current version of Tower that you are on is 3.0.0, 3.0.1, or 3.0.2, use only the 3.0.2 installer.

The Tower setup playbook is invoked as `setup.sh` from the path where you unpacked the Tower installer tarball. It uses the `tower_setup_conf.yml` and `inventory` files written by the Tower Installation Wizard. The setup script takes the following arguments for backing up and restoring:

- `-b` Perform a database backup rather than an installation.
- `-r` Perform a database restore rather than an installation.

As the root user, call `setup.sh` with the appropriate parameters and Tower backup or restored as configured.

```
root@localhost:~$ ./setup.sh -b
```

```
root@localhost:~$ ./setup.sh -r
```

A default restore path is used unless `EXTRA_VARS` are provided with a non-default path, as shown in the code example below:

```
root@localhost:~$ ./setup.sh -e 'restore_backup_file=/path/to/nondefault/location' -r
```

18.1 Backup/Restore Playbooks

In addition to the `install.yml` file included with your `setup.sh` setup playbook, there are also `backup.yml` and `restore.yml` files for your backup and restoration needs.

These playbooks serve two functions:

- To backup the configuration files, keys, and other relevant files, plus the database of the Tower installation.
- To restore the backed up files and data to a freshly installed and working second instance of Tower.

The `backup.yml` file looks like the following:

```
---
- hosts: primary
  gather_facts: yes
```

```
roles:
  - backup
```

And is called within `setup.sh` as:

```
b)
PLAYBOOK="backup.yml"
TEMP_LOG_FILE="backup.log"
OPTIONS="$OPTIONS --force-handlers"
;;
```

The `restore.yml` file looks like the following:

```
---
- hosts: primary
  gather_facts: yes
  roles:
    - restore
```

And is called within `setup.sh` as:

```
r)
PLAYBOOK="restore.yml"
TEMP_LOG_FILE="restore.log"
OPTIONS="$OPTIONS --force-handlers"
;;
```

When restoring your system, Tower checks to see that the backup file exists before beginning the restoration. If the backup file is not available, your restoration will fail.

Note: Ensure your Tower host(s) are properly set up with SSH keys or user/pass variables in the hosts file, and that the user has sudo access.

18.2 Backup and Restoration Considerations

- **Disk Space:** Review your disk space requirements to ensure you have enough room to backup configuration files, keys, and other relevant files, plus the database of the Tower installation.
- **System Credentials:** Confirm you have the system credentials you need when working with a local database or a remote database. On local systems, you may need root or `sudo` access, depending on how credentials were setup. On remote systems, you may need different credentials to grant you access to the remote system you are trying to backup or restore.
- You should always use the most recent minor version of a release to backup and/or restore your Tower installation version. For example, if the current version of Tower that you are on is 3.0.0, 3.0.1, or 3.0.2, use only the 3.0.2 installer.
- When using `setup.sh` to do a restore, `-r` is still required in order to do the restore, but it no longer accepts an argument. If a non-default restore file path is needed, the user must provide this as an extra var (`-e 'restore_backup_file=/path/to/nondefault'`)

USING CUSTOM LOGOS IN ANSIBLE TOWER

Note: Custom rebranding was added to Ansible Tower with version 2.4.0 and is available to Enterprise-level license holders.

Ansible Tower supports the use of a custom logo. To set up a custom logo, navigate to `Configure Tower` in the settings menu and upload it via the `Custom Logo` item. For the custom logo to look its best, use a `.png` file with a transparent background. GIF, PNG, and JPEG formats are supported.


Selecting `Revert` will result in the appearance of the standard Ansible Tower logo.

If needed, you can add specific information (such as a legal notice or a disclaimer) to a text box in the login modal by adding it to the `Custom Login Info` box on the same page.

For example, if you uploaded a specific logo, and added the following text:

`"The mustard indicates progress."`

The Tower login dialog would look like this:



Welcome to Ansible Tower! [Please sign in.](#)

*** Username**

*** Password**

Notice
The mustard indicates progress.

[➔ Sign in](#)

TROUBLESHOOTING TOWER

20.1 Error logs

Tower server errors are logged in `/var/log/tower`. Supervisors logs can be found in `/var/log/supervisor/`. Nginx web server errors are logged in the `httpd` error log. Configure other Tower logging needs in `/etc/tower/conf.d/`.

Explore client-side issues using the JavaScript console built into most browsers and report any errors to Ansible via the Red Hat Customer portal at <https://access.redhat.com/>.

20.2 Problems connecting to your host

If you are unable to run the `helloworld.yml` example playbook from the Quick Start Guide or other playbooks due to host connection errors, try the following:

- Can you `ssh` to your host? Ansible depends on SSH access to the servers you are managing.
- Are your hostnames and IPs correctly added in your inventory file? (Check for typos.)

20.3 WebSockets port for live events not working

Ansible Tower uses port 80/443 on the Tower server to stream live updates of playbook activity and other events to the client browser. These ports are configured for 80/443 by default, but if they are blocked by firewalls, close any firewall rules that opened up or added for the previous websocket ports, this will ensure your firewall allows traffic through this port.

20.4 Problems running a playbook

If you are unable to run the `helloworld.yml` example playbook from the Quick Start Guide or other playbooks due to playbook errors, try the following:

- Are you authenticating with the user currently running the commands? If not, check how the username has been setup or pass the `--user=username` or `-u username` commands to specify a user.
- Is your YAML file correctly indented? You may need to line up your whitespace correctly. Indentation level is significant in YAML. You can use `yamllint` to check your playbook. For more information, refer to the YAML primer at: <http://docs.ansible.com/YAMLSyntax.html>

- Items beginning with a `-` are considered list items or plays. Items with the format of `key: value` operate as hashes or dictionaries. Ensure you don't have extra or missing `-` plays.

20.5 Problems when running a job

If you are having trouble running a job from a playbook, you should review the playbook YAML file. When importing a playbook, either manually or via a source control mechanism, keep in mind that the host definition is controlled by Tower and should be set to `hosts: all`.

20.6 Playbooks aren't showing up in the “Job Template” drop-down

If your playbooks are not showing up in the Job Template drop-down list, here are a few things you can check:

- Make sure that the playbook is valid YML and can be parsed by Ansible.
- Make sure the permissions and ownership of the project path (`/var/lib/awx/projects`) is set up so that the “awx” system user can view the files. You can run this command to change the ownership:

```
chown awx -R /var/lib/awx/projects/
```

20.7 Playbook stays in pending

If you are attempting to run a playbook Job and it stays in the “Pending” state indefinitely, try the following:

- Ensure all supervisor services are running via `supervisorctl status`.
- Check to ensure that the `/var/` partition has more than 1 GB of space available. Jobs will not complete with insufficient space on the `/var/` partition.
- Run `ansible-tower-service restart` on the Tower server.

If you continue to have problems, run `sosreport` as root on the Tower server, then file a [support request](#) with the result.

20.8 Cancel a Tower job

When issuing a `cancel` request on a currently running Tower job, Tower issues a `SIGINT` to the `ansible-playbook` process. While this causes Ansible to stop dispatching new tasks and exit, in many cases, module tasks that were already dispatched to remote hosts will run to completion. This behavior is similar to pressing `Ctrl-C` during a command-line Ansible run.

With respect to software dependencies, if a running job is canceled, the job is essentially removed but the dependencies will remain.

20.9 Reusing an external HA database causes installations to fail

Instances have been reported where reusing the external DB during subsequent HA installations causes installation failures.

For example, say that you performed an HA installation. Next, say that you needed to do this again and performed a second HA installation reusing the same external database, only this subsequent installation failed.

When setting up an external HA database which has been used in a prior installation, the HA database must be manually cleared before any additional installations can succeed.

20.9.1 Bubblewrap functionality and variables

The bubblewrap functionality in Ansible Tower limits which directories on the Tower file system are available for playbooks to see and use during playbook runs. You may find that you need to customize your bubblewrap settings in some cases. To fine tune your usage of bubblewrap, there are certain variables that can be set.

To disable bubblewrap support for running jobs (playbook runs only):

```
AWX_PROOT_ENABLED = False
```

To enable bubblewrap support for running jobs (playbook runs only):

```
AWX_PROOT_ENABLED = True
```

By default, the Tower will use the system's `tmp` directory (`/tmp` by default) as its staging area. This can be changed in the **Job Isolation Execution Path** field of the Configure tower screen, or by updating the following entry in the settings file:

```
AWX_PROOT_BASE_PATH = "/opt/tmp"
```

If there is other information on the system that is sensitive and should be hidden, you can specify those in the Configure Tower screen in the **Paths to Hide to Isolated Jobs** or by updating the following entry in the settings file:

```
AWX_PROOT_HIDE_PATHS = ['/list/of/', '/paths']
```

If there are any directories that should specifically be exposed, you can specify those in the Configure Tower screen in the **Paths to Expose to Isolated Jobs** or by updating the following entry in the settings file:

```
AWX_PROOT_SHOW_PATHS = ['/list/of/', '/paths']
```

Note: The primary file you may want to add to `AWX_PROOT_SHOW_PATHS` is `/var/lib/awx/.ssh`, if your playbooks need to use keys or settings defined there.

If you made changes in the settings file, be sure to restart services with the `ansible-tower-service restart` command after your changes have been saved.

20.10 Private EC2 VPC Instances in Tower Inventory

By default, Tower only shows instances in a VPC that have an Elastic IP (EIP) associated with them. To see all of your VPC instances, perform the following steps:

1. In the Tower interface, select your inventory.
2. Click on the group that has the Source set to AWS, and click on the Source tab.
3. In the Source Variables box, enter:

```
vpc_destination_variable: private_ip_address
```

Next, save and then trigger an update of the group. Once this is done, you should be able to see all of your VPC instances.

Note: Tower must be running inside the VPC with access to those instances if you want to configure them.

20.11 Troubleshooting “Error: provided hosts list is empty”

If you receive the message “Skipping: No Hosts Matched” when you are trying to run a playbook through Tower, here are a few things to check:

- Make sure that your hosts declaration line in your playbook matches the name of your group/host in inventory exactly (these are case sensitive).
- If it does match and you are using Ansible Core 2.0 or later, check your group names for spaces and modify them to use underscores or no spaces to ensure that the groups can be recognized.
- Make sure that if you have specified a Limit in the Job Template that it is a valid limit value and still matches something in your inventory. The Limit field takes a pattern argument, described here: http://docs.ansible.com/intro_patterns.html

Please file a support ticket if you still run into issues after checking these options.

TOWER TIPS AND TRICKS

21.1 Using the Tower CLI Tool

Ansible Tower has a full-featured command line interface. It communicates with Tower via Tower's REST API. You can install it from any machine with access to your Tower machine, or on Tower itself.

Installation can be done using the `pip` command:

```
pip install ansible-tower-cli
```

Refer to *Introduction to tower-cli* and <https://github.com/ansible/tower-cli/blob/master/README.rst> for configuration and usage instructions.

21.2 Launching a Job Template via the API

Ansible Tower makes it simple to launch a job based on a Job Template from Tower's API or by using the `tower-cli` command line tool.

Launching a Job Template also:

- Creates a Job Record
- Gives that Job Record all of the attributes on the Job Template, combined with certain data you can give in this launch endpoint ("runtime" data)
- Runs Ansible with the combined data from the JT and runtime data

Runtime data takes precedence over the Job Template data, contingent on the `ask__on_launch` field on the job template being set to `True`. For example, a runtime credential is only accepted if the Job Template has `ask_credential_on_launch` set to `True`.

Launching from Job Templates via the API follows the following workflow:

- GET `https://your.tower.server/api/v1/job_templates/<your job template id>/launch/`. The response will contain data such as `job_template_data` and `defaults` which give information about the job template.
- Inspect returned data for runtime data that is needed to launch. Inspecting the `OPTIONS` of the launch endpoint may also help deduce what `POST` fields are allowed.

Warning: Providing certain runtime credentials could introduce the need for a password not listed in `passwords_needed_to_start`.

- `passwords_needed_to_start`: List of passwords needed
 - `credential_needed_to_start`: Boolean
 - `inventory_needed_to_start`: Boolean
 - `variables_needed_to_start`: List of fields that need to be passed inside of the `extra_vars` dictionary
- Inspect returned data for optionally allowed runtime data that the user should be asked for.
 - `ask_variables_on_launch`: Boolean specifying whether to prompt the user for additional variables to pass to Ansible inside of `extra_vars`
 - `ask_tags_on_launch`: Boolean specifying whether to prompt the user for `job_tags` on launch (allow allows use of `skip_tags` for convenience)
 - `ask_job_type_on_launch`: Boolean specifying whether to prompt the user for `job_type` on launch
 - `ask_limit_on_launch`: Boolean specifying whether to prompt the user for `limit` on launch
 - `ask_inventory_on_launch`: Boolean specifying whether to prompt the user for the related field `inventory` on launch
 - `ask_credential_on_launch`: Boolean specifying whether to prompt the user for the related field `credential` on launch
 - `survey_enabled`: Boolean specifying whether to prompt the user for additional `extra_vars`, following the job template's `survey_spec` Q&A format
 - **POST** `https://your.tower.server/api/v1/job_templates/<your job template id>/launch/` with any required data gathered during the previous step(s). The variables that can be passed in the request data for this action include the following.
 - `extra_vars`: A string that represents a JSON or YAML formatted dictionary (with escaped parentheses) which includes variables given by the user, including answers to survey questions
 - `job_tags`: A string that represents a comma-separated list of tags in the playbook to run
 - `limit`: A string that represents a comma-separated list of hosts or groups to operate on
 - `inventory`: A integer value for the foreign key of an inventory to use in this job run
 - `credential`: A integer value for the foreign key of a credential to use in this job run

The POST will return data about the job and information about whether the runtime data was accepted. The job id is given in the `job` field to maintain compatibility with tools written before 3.0. The response will look similar to:

```
{
  "ignored_fields": {
    "credential": 2,
    "job_tags": "setup,teardown"
  }
  "id": 4,
  ...more data about the job...
  "job": 4,
}
```

In this example, values for `credential` and `job_tags` were given while the job template `ask_credential_on_launch` and `ask_tags_on_launch` were `False`. These were rejected because the job template author did not allow using runtime values for them.

You can see details about the job in this response. To get an updated status, you will need to do a GET request to the job page, `/jobs/4`, or follow the `url` link in the response. You can also find related links to cancel, relaunch, and so fourth.

Note: When querying a job on a non-execution node, an error message, `stdout capture is missing` displays for the `result_stdout` field and on the related stdout page. In order to generate the stdout, use the `format=txt_download` query parameter for the related stdout page. This generates the stdout file and any refreshes to either the job or the related std will display the job output.

Note: You cannot assign a new inventory at the time of launch to a scan job. Scan jobs must be tied to a fixed inventory.

Note: You cannot change the Job Type at the time of launch to or from the type of “scan”. The `ask_job_type_on_launch` option only enables you to toggle “run” versus “check” at launch time.

21.3 tower-cli Job Template Launching

From the Tower command line, you can use `tower-cli` as a method of launching your Job Templates.

For help with `tower-cli` launch, use:

```
tower-cli job launch --help.
```

For launching from a job template, invoke `tower-cli` in a way similar to:

For an example of how to use the API, you can also add the `-v` flag here:

```
tower-cli job launch --job-template=4 -v
```

21.4 Changing the Tower Admin Password

During the installation process, you are prompted to enter an administrator password which is used for the `admin` superuser/first user created in Tower. If you log into the instance via SSH, it will tell you the default admin password in the prompt. If you need to change this password at any point, run the following command as root on the Tower server:

```
tower-manage changepassword admin
```

Next, enter a new password. After that, the password you have entered will work as the admin password in the web UI.

21.5 Creating a Tower Admin from the commandline

Once in a while you may find it helpful to create an admin (superuser) account from the commandline. To create an admin, run the following command as root on the Tower server and enter in the admin information as prompted:

```
tower-manage createsuperuser
```

21.6 Setting up a jump host to use with Tower

Credentials supplied by Tower will not flow to the jump host via ProxyCommand. They are only used for the end-node once the tunneled connection is set up.

To make this work, configure a fixed user/keyfile in the AWX user's SSH config in the ProxyCommand definition that sets up the connection through the jump host. For example:

```
Host tampa
  Hostname 10.100.100.11
  IdentityFile [privatekeyfile]

Host 10.100..
  Proxycommand ssh -W [jumphostuser]@%h:%p tampa
```

Note: You must disable PRoot by default if you need to use a jump host. You can disable PRoot by navigating to the `/etc/tower/settings.py` file, setting `AWX_PROOT_ENABLED=False`, then restarting services with the `ansible-tower-service restart` command.

21.7 View Ansible outputs for JSON commands when using Tower

When working with Ansible Tower, you can use the API to obtain the Ansible outputs for commands in JSON format.

To view the Ansible outputs, browse to:

```
https://<tower server name>/api/v1/jobs/<job_id>/job_events/
```

21.8 Locate and configure the Ansible configuration file

While Ansible does not require a configuration file, OS packages often include a default one in `/etc/ansible/ansible.cfg` for possible customization. You can also install your own copy in `~/.ansible.cfg` or keep a copy in a directory relative to your playbook named as `ansible.cfg`.

To learn which values you can use in this file, refer to the [configuration file on github](#).

Using the defaults are acceptable for starting out, but know that you can configure the default module path or connection type here, as well as other things.

Tower overrides some `ansible.cfg` options. For example, Tower stores the SSH ControlMaster sockets, the SSH agent socket, and any other per-job run items in a per-job temporary directory, secured by multi-tenancy access control restrictions via PRoot.

21.9 View a listing of all `ansible_` variables

Ansible by default gathers “facts” about the machines under its management, accessible in Playbooks and in templates. To view all facts available about a machine, run the `setup` module as an ad hoc action:

```
ansible -m setup hostname
```

This prints out a dictionary of all facts available for that particular host. For more information, refer to: https://docs.ansible.com/ansible/playbooks_variables.html#information-discovered-from-systems-facts

21.10 Using virtualenv with Ansible Tower

Ansible Tower 3.0 uses *virtualenv*. Virtualenv creates isolated Python environments to avoid problems caused by conflicting dependencies and differing versions. Virtualenv works by simply creating a folder which contains all of the necessary executables and dependencies for a specific version of Python. Ansible Tower creates two virtualenvs during installation—one is used to run Tower, while the other is used to run Ansible. This allows Tower to run in a stable environment, while allowing you to add or update modules to your Ansible Python environment as necessary to run your playbooks.

Note: For more information on virtualenv, see [Virtual Environments](#)

21.10.1 Modifying the virtualenv

Modifying the virtualenv used by Tower is unsupported and not recommended. Instead, you can add modules to the virtualenv that Tower uses to run Ansible.

To do so, activate the Ansible virtualenv:

```
. /var/lib/awx/venv/ansible/bin/activate
```

...and then install whatever you need using `pip`:

```
pip install mypackagename
```

21.11 Configuring the `towerhost` hostname for notifications

In `/etc/tower/settings.py`, you can modify `TOWER_URL_BASE='https://tower.example.com'` to change the notification hostname, replacing `https://tower.example.com` with your preferred hostname. You must restart Tower services after saving your changes with `ansible-tower-service restart`.

Refreshing your Tower license also changes the notification hostname. New installations of Ansible Tower 3.0 should not have to set the hostname for notifications.

21.12 Launching Jobs with `curl`

Note: Tower now offers a full-featured command line interface called `tower-cli` which may be of interest to you if you are considering using `curl`.

This method works with Tower versions 2.1.x and newer.

Launching jobs with the Tower API is simple. Here are some easy to follow examples using the `curl` tool.

Assuming that your Job Template ID is '1', your Tower IP is 192.168.42.100, and that `admin` and `awxsecret` are valid login credentials, you can create a new job this way:

```
curl -f -k -H 'Content-Type: application/json' -XPOST \
  --user admin:awxsecret \
  http://192.168.42.100/api/v1/job_templates/1/launch/
```

This returns a JSON object that you can parse and use to extract the 'id' field, which is the ID of the newly created job.

You can also pass extra variables to the Job Template call, such as is shown in the following example:

```
curl -f -k -H 'Content-Type: application/json' -XPOST \
  -d '{"extra_vars": "{\"foo\": \"bar\"}"}' \
  --user admin:awxsecret http://192.168.42.100/api/v1/job_templates/1/launch/
```

You can view the live API documentation by logging into <http://192.168.42.100/api/> and browsing around to the various objects available.

Note: The `extra_vars` parameter needs to be a string which contains JSON, not just a JSON dictionary, as you might expect. Use caution when escaping the quotes, etc.

21.13 Dynamic Inventory and private IP addresses

By default, Tower only shows instances in a VPC that have an Elastic IP (EIP) address associated with them. To view all of your VPC instances, perform the following steps:

- In the Tower interface, select your inventory.
- Click on the group that has the Source set to AWS, and click on the Source tab.
- In the “Source Variables” box, enter: `vpc_destination_variable: private_ip_address`

Save and trigger an update of the group. You should now be able to see all of your VPC instances.

Note: Tower must be running inside the VPC with access to those instances in order to usefully configure them.

21.14 Filtering instances returned by the dynamic inventory sources in Tower

By default, the dynamic inventory sources in Tower (AWS, Rackspace, etc) return all instances available to the cloud credentials being used. They are automatically joined into groups based on various attributes. For example, AWS instances are grouped by region, by tag name and value, by security groups, etc. To target specific instances in your environment, write your playbooks so that they target the generated group names. For example:

```
---
- hosts: tag_Name_webserver
  tasks:
  ...
```


You can also use the `Limit` field in the Job Template settings to limit a playbook run to a certain group, groups, hosts, or a combination thereof. The syntax is the same as the `--limit` parameter on the `ansible-playbook` command line.

You may also create your own groups by copying the auto-generated groups into your custom groups. Make sure that the `Overwrite` option is disabled on your dynamic inventory source, otherwise subsequent synchronization operations will delete and replace your custom groups.

21.15 Using an unreleased module from Ansible source with Tower

If there is a feature that is available in the latest Ansible core branch that you would like to leverage with your Tower system, making use of it in Tower is fairly simple.

First, determine which is the updated module you want to use from the available Ansible Core Modules or Ansible Extra Modules GitHub repositories.

Next, create a new directory, at the same directory level of your Ansible source playbooks, named `/library`.

Once this is created, copy the module you want to use and drop it into the `/library` directory—it will be consumed first over your system modules and can be removed once you have updated the the stable version via your normal package manager.

21.16 Using callback plugins with Tower

Ansible has a flexible method of handling actions during playbook runs, called callback plugins. You can use these plugins with Tower to do things like notify services upon playbook runs or failures, send emails after every playbook run, etc. For official documentation on the callback plugin architecture, refer to: http://docs.ansible.com/developing_plugins.html#callbacks

You may also want to review some example plugins, which should be modified for site-specific purposes, such as those available at: <https://github.com/ansible/ansible/tree/devel/lib/ansible/plugins/callback>

To use these plugins, put the callback plugin `.py` file into a directory called `/callback_plugins` alongside your playbook in your Tower Project.

To make callbacks apply to every playbook, independent of any projects, put the plugins `.py` file in one of the following directories (depending on your particular Linux distribution and method of Ansible installation):

```
* /usr/lib/python2.7/ansible/callback_plugins
* /usr/local/lib/python2.7/dist-packages/ansible/callback_plugins
* /usr/lib/python2.6/site-packages/ansible/callback_plugins
```


Note: To have most callbacks shipped with Ansible applied globally, you must add them to the `callback_whitelist` section of your `ansible.cfg`.

21.17 Connecting to Windows with winrm

By default Tower attempts to `ssh` to hosts. You must add the `winrm` connection info to the group variables to which the Windows hosts belong. To get started, edit the Windows group in which the hosts reside and place the variables in

the source/edit screen for the group.

To add `winrm` connection info:

Edit the properties for the selected group by clicking on the  button to the right of the group name that contains the Windows servers. In the “variables” section, add your connection information as such: `ansible_connection: winrm`

Once done, save your edits. If Ansible was previously attempting an SSH connection and failed, you should re-run the job template.

21.18 Importing existing inventory files and host/group vars into Tower

To import an existing static inventory and the accompanying host and group vars into Tower, your inventory should be in a structure that looks similar to the following:

```
inventory/
|-- group_vars
|   |-- mygroup
|-- host_vars
|   |-- myhost
|-- hosts
```

To import these hosts and vars, run the `tower-manage` command:

```
tower-manage inventory_import --source=inventory/ \
    --inventory-name="My Tower Inventory"
```

If you only have a single flat file of inventory, a file called `ansible-hosts`, for example, import it like the following:

```
tower-manage inventory_import --source=./ansible-hosts \
    --inventory-name="My Tower Inventory"
```

In case of conflicts or to overwrite an inventory named “My Tower Inventory”, run:

```
tower-manage inventory_import --source=inventory/ \
    --inventory-name="My Tower Inventory" \
    --overwrite --overwrite-vars
```

If you receive an error, such as:

```
ValueError: need more than 1 value to unpack
```

Create a directory to hold the hosts file, as well as the `group_vars`:

```
mkdir -p inventory-directory/group_vars
```

Then, for each of the groups that have `:vars` listed, create a file called `inventory-directory/group_vars/<groupname>` and format the variables in YAML format.

Once broken out, the importer will handle the conversion correctly.

INTRODUCTION TO TOWER-CLI

tower-cli is a command line tool for Ansible Tower. It allows Tower commands to be easily run from the UNIX command line. It can also be used as a client library for other python apps, or as a reference for others developing API interactions with Tower's REST API.

Note: The `tower-cli` software is an open source project currently under development and, until a complete implementation occurs, only implements a subset of Tower's features.

22.1 License

While Tower is commercially licensed software, `tower-cli` is an open source project. Specifically, this project is licensed under the Apache 2.0 license. Pull requests, contributions, and tickets filed in GitHub are warmly welcomed.

22.2 Capabilities

`tower-cli` sends commands to the Tower API. It is capable of retrieving, creating, modifying, and deleting most objects within Tower.

A few potential uses include:

- Launching playbook runs (for instance, from Jenkins, TeamCity, Bamboo, etc)
- Checking on job statuses
- Rapidly creating objects like organizations, users, teams, and more

22.3 Installation

`tower-cli` is available as a package on [PyPI](#).

The preferred way to install is through `pip`:

```
$ pip install ansible-tower-cli
```

The main branch of this project may also be consumed directly from source.

For more information on `tower-cli`, refer to the project page at:

<https://github.com/ansible/tower-cli/>

22.4 Configuration

`tower-cli` can edit its own configuration or users can directly edit the configuration file, allowing configuration to be set in multiple ways.

22.4.1 Set configuration with `tower-cli config`

The preferred way to set configuration is with the `tower-cli config` command.

```
$ tower-cli config key value
```

By issuing the `tower-cli config` command without arguments, you can view a full list of configuration options and where they are set. The default behavior allows environment variables to override your `tower-cli.cfg` settings, but they will not override configuration values that are passed in on the command line at runtime. The available environment variables and their corresponding Tower configuration keys are as follows:

- `TOWER_COLOR`: color
- `TOWER_FORMAT`: format
- `TOWER_HOST`: host
- `TOWER_PASSWORD`: password
- `TOWER_USERNAME`: username
- `TOWER_VERIFY_SSL`: verify_ssl
- `TOWER_VERBOSE`: verbose
- `TOWER_DESCRIPTION_ON`: description_on
- `TOWER_CERTIFICATE`: certificate

You will generally need to set at least three configuration options—host, username, and password—which correspond to the location of your Ansible Tower instance and your credentials to authenticate to Tower.

```
$ tower-cli config host tower.example.com
$ tower-cli config username leeroyjenkins
$ tower-cli config password myPassw0rd
```

22.4.2 Write to the config files directly.

The configuration file can also be edited directly. A configuration file is a simple file with keys and values, separated by `:` or `=`:

```
host: tower.example.com
username: admin
password: p4ssw0rd
```

22.4.3 File Locations

The order of precedence for configuration file locations is as follows, from least to greatest:

- internal defaults
- `/etc/awx/tower_cli.cfg` (written using `tower-cli config --global`)

- `~/tower_cli.cfg` (written using `tower-cli config`)
- run-time parameters

22.4.4 Usage

`tower-cli` invocation generally follows this format:

```
$ tower-cli {resource} {action} ...
```

The **resource** is a type of object within Tower (a noun), such as `user`, `organization`, `job_template`, etc.; resource names are always singular in Tower CLI (use `tower-cli user`, never `tower-cli users`).

The **action** is the thing you want to do (a verb). Most `tower-cli` resources have the following actions—`get`, `list`, `create`, `modify`, and `delete`—and have options corresponding to fields on the object in Tower.

Examples of actions and resources include (but are not limited to):

User Actions

```
# List all users.
$ tower-cli user list

# List all non-superusers
$ tower-cli user list --is-superuser=false

# Get the user with the ID of 42.
$ tower-cli user get 42

# Get the user with the given username.
$ tower-cli user get --username=guido

# Create a new user.
$ tower-cli user create --username=guido --first-name=Guido \
    --last-name="Van Rossum" --email=guido@python.org

# Modify an existing user.
# This would modify the first name of the user with the ID of "42" to "Guido".
$ tower-cli user modify 42 --first-name=Guido

# Modify an existing user, lookup by username.
# This would use "username" as the lookup, and modify the first name.
# Which fields are used as lookups vary by resource, but are generally
# the resource's name.
$ tower-cli user modify --username=guido --first-name=Guido

# Delete a user.
$ tower-cli user delete 42
```

Job Actions

```
# Launch a job.
$ tower-cli job launch --job-template=144
```

```
# Monitor a job.
$ tower-cli job monitor 95
```

Group Actions

```
# Get a list of groups.
$ tower-cli group --list.

# Sync a group by the groupID.
$ tower-cli group sync $groupID
```

When in doubt, check the help for more options:

```
$ tower-cli # help
$ tower-cli user --help # resource specific help
$ tower-cli user create --help # command specific help
```

Workflow Actions

Starting with Tower 3.1.0 and Tower-CLI 3.1.0, workflow networks can be managed from Tower-CLI either by normal CRUD actions or by using a YAML file that defines the workflow network.

```
# Print out the schema for a workflow
$ tower-cli workflow schema workflow_name

# Create the network defined in file "schema.yml"
$ tower-cli workflow schema workflow_name @schema.yml
```

The following is an example of what a schema might look like.

```
- job_template: Hello world
  failure:
  - inventory_source: AWS servers (AWS servers - 42)
  success:
  - project: Ansible Examples
    always:
    - job_template: Echo variable
      success:
      - job_template: Scan localhost
```

For more details, see the tower-cli workflow doc at

<https://github.com/ansible/tower-cli/blob/master/docs/WORKFLOWS.md>

22.4.5 Specify extra variables

There are a number of ways to pass extra variables to the Tower server when launching a job:

- Pass data in a file using the flag `--extra-vars="@filename.yml"`
- Include yaml data at runtime with the flag `--extra-vars="var: value"`
- A command line editor automatically pops up when the job template is marked to prompt on launch
- If the job template has extra variables, these are not over-ridden

These methods can also be combined. For instance, if you give the flag multiple times on the command line, specifying a file in addition to manually giving extra variables, these two sources are combined and sent to the Tower server.

```
# Launch a job with extra variables from filename.yml, and also a=5
$ tower-cli job launch --job-template=1 --extra-vars="a=5 b=3" \
    --extra-vars="@filename.yml"

# Create a job template with that same set of extra variables
$ tower-cli job_template create --name=test_job_template --project=1 \
    --inventory=1 --playbook=helloworld.yml \
    --machine-credential=1 --extra-vars="a=5 b=3" \
    --extra-vars="@filename.yml"
```

You may not combine multiple sources when modifying a job template. Whitespace can be used in strings like `--extra-vars="a='white space'"`, and list-valued parameters can be sent as JSON or YAML, but not key=value pairs. For instance, `--extra-vars="a: [1, 2, 3, 4, 5]"` sends the parameter "a" with that list as its value.

Note: Additional strict `extra_vars` validation was added in Ansible Tower 3.0.0. `extra_vars` passed to the job launch API are only honored if one of the following is true:

- They correspond to variables in an enabled survey
- `ask_variables_on_launch` is set to `True`

22.4.6 SSL warnings

By default, `tower-cli` raises an error if the SSL certificate of the Tower server cannot be verified. To allow unverified SSL connections, set the config variable, `verify_ssl`, to `true`. To allow it for a single command, add the `--insecure` flag.

```
# Disable insecure connection warnings permanently
$ tower-cli config verify_ssl false

# Disable insecure connection warnings for just this command
$ tower-cli job_template list --insecure
```

USABILITY ANALYTICS AND DATA COLLECTION

In Ansible Tower version 2.4.0, a behind the scenes functionality was added to Tower to collect usability data. This software was introduced to better understand how Tower users specifically interact with Tower, to help enhance future releases, and to continue streamlining your user experience.

Only users installing a trial of Tower or a fresh installation of Tower are opted-in for this data collection.

If you want to change how you participate in this analytics collection, you can opt out or change your settings using either the command line or the Tower user interface. For user interface instructions, refer to the [Ansible Tower Administration Guide](#).

To opt out using the command line, navigate to the `/etc/tower/` directory and set the following in `settings.py`:

```
PENDO_TRACKING_STATE = 'off'
```

Once set, you must restart your instance of Tower using the `ansible-tower-service restart` command, re-authenticate, and force-reload your browser session.

To re-enable data collection, navigate to the `/etc/tower/` directory and set the following in `settings.py`:

```
PENDO_TRACKING_STATE = 'detailed'
```

Once set, you must restart your instance of Tower using the `ansible-tower-service restart` command, re-authenticate, and force-reload your browser session.

To enable data collection without your specific user data, navigate to the `/etc/tower/` directory and set the following in `settings.py`:

```
PENDO_TRACKING_STATE = 'anonymous'
```

Once set, you must restart your instance of Tower using the `ansible-tower-service restart` command, re-authenticate, and force-reload your browser session.

CHAPTER TWENTYFOUR

POSTFACE

Through community efforts, rigorous testing, dedicated engineers, enterprising sales teams, imaginative marketing, and outstanding professional services and support teams, the growing but always impressive group of individuals that make the Ansible-branded products can feel proud in saying:

Ansible, Ansible Tower, Tower CLI, and Ansible Galaxy are all, as Doge would say, “much approved.”¹

¹ <http://knowyourmeme.com/memes/doge>



Josie Tested - Doge Approved.

INDEX

- `genindex`

COPYRIGHT © 2017 RED HAT, INC.

Ansible, Ansible Tower, Red Hat, and Red Hat Enterprise Linux are trademarks of Red Hat, Inc., registered in the United States and other countries.

If you distribute this document, or a modified version of it, you must provide attribution to Red Hat, Inc. and provide a link to the original version.

Third Party Rights

Ubuntu and Canonical are registered trademarks of Canonical Ltd.

The CentOS Project is copyright protected. The CentOS Marks are trademarks of Red Hat, Inc. (“Red Hat”).

Microsoft, Windows, Windows Azure, and Internet Explore are trademarks of Microsoft, Inc.

VMware is a registered trademark or trademark of VMware, Inc.

Rackspace trademarks, service marks, logos and domain names are either common-law trademarks/service marks or registered trademarks/service marks of Rackspace US, Inc., or its subsidiaries, and are protected by trademark and other laws in the United States and other countries.

Amazon Web Services”, “AWS”, “Amazon EC2”, and “EC2”, are trademarks of Amazon Web Services, Inc. or its affiliates.

OpenStack™ and OpenStack logo are trademarks of OpenStack, LLC.

Chrome™ and Google Compute Engine™ service registered trademarks of Google Inc.

Safari® is a registered trademark of Apple, Inc.

Firefox® is a registered trademark of the Mozilla Foundation.

All other trademarks are the property of their respective owners.

Symbols

: API

launching a Job Template, 79

A

Active Directory (AD)

Kerberos, 67

activity stream cleanup management job, 9

admin creation

commandline, 81

tips, 81

admin password

changing password, 81

admin password change

tips, 81

admin utility script, 5

analytics collection, 92

Ansible configuration file, 82

Ansible modules, unreleased

tips, 85

Ansible output for JSON commands, 82

Ansible, executing in a virtual environment, 83

ansible-tower script replacement, 5

ansible.cfg, 82

tips, 82

ansible_variables, viewing all

tips, 82

AUTH_BASIC_ENABLED

session limits, 70

AUTH_TOKEN_PER_USER

session limits, 70

authentication, 35, 40, 49

Azure AD, 49

configuration, 35

Github OAuth2, 42

Github Org, 44

Github Team, 45

Google OAuth2, 40

LDAP, 58, 63

LDAP mapping, 63

LDAP team mapping, 63

organization mapping, 46, 63

RADIUS Authentication Settings, 56

SAML Service Provider, 51

team mapping, 46, 63

authentication expiring, 65, 66

authentication timeout

changing the default, 65

troubleshooting, 65

authentication token, 65, 66

Azure AD

authentication, 49

B

backups, 71

considerations, 72

playbooks, 71

best practices, 79

bubblewrap

functionality, 39, 77

troubleshooting, 39, 77

variables, 39, 77

C

callback plugins

tips, 85

change password

tower-manage, 81

changing password

admin password, 81

changing the default

authentication timeout, 65

cleaning old data, 9

cleanup activity stream

management jobs, 9

cleanup fact details

management jobs, 13

cleanup job history

management jobs, 16

cluster

deprovisioning, 25

command line interface

tips, 79

Tower CLI, 79

- commandline
 - admin creation, 81
- components
 - licenses, 4
- configuration
 - authentication, 35
 - custom login message, 38
 - custom logo, 38
 - data collection, 38
 - jobs, 36
 - system, 37
 - UI, 38
- configuration file configuration
 - tips, 82
- configuration file location
 - tips, 82
- configure Tower, 35
- curl
 - tips, 83
- custom
 - login message, 38
 - logo, 38, 73
- custom inventory scripts, 6
- custom login message
 - configuration, 38
- custom logo, 73
 - configuration, 38

D

- data collection, 92
 - configuration, 38
- DEB files
 - licenses, 4
- dynamic inventory and instance filtering
 - tips, 84
- dynamic inventory and private IPs
 - tips, 84

E

- EC2
 - VPC instances, 77
- EC2 VPC instances
 - tips, 84
 - troubleshooting, 77
- Elastic stack
 - logging, 29
- ELK stack
 - logging, 29
- enterprise authentication, 35, 49
- error logs
 - troubleshooting, 75
- evaluation, 3
- external HA database
 - installation failure, 76

F

- fact details cleanup management job, 13
- features, 1
- filtering instances
 - tips, 84
- functionality
 - bubblewrap, 39, 77

G

- general help
 - troubleshooting, 75
- Github OAuth2
 - authentication, 42
- Github Org
 - authentication, 44
- Github Team
 - authentication, 45
- Google OAuth2
 - authentication, 40

H

- help, 75, 79
- host connections
 - troubleshooting, 75
- host/group vars import
 - tips, 86
- hostname configuration
 - notifications, 83
- hosts list
 - troubleshooting, 78
- hosts lists (empty), 78

I

- importing host/group vars
 - importing inventory, 86
- importing inventory
 - importing host/group vars, 86
- init script replacement, 5
- installation bundle
 - licenses, 4
- installation failure
 - external HA database, 76
- installation wizard
 - playbook backup/restore arguments, 71
- instance filtering
 - tips, 84
- inventory import
 - tips, 86
- inventory scripts
 - custom, 6
 - writing, 8

J

- job cancellation

- troubleshooting, 76
- job does not run
 - troubleshooting, 76
- job history cleanup management job, 16
- Job Template drop-down list
 - playbooks are not viewable, 76
- jobs, 36
 - configuration, 36
- JSON commands, Ansible output, 82
- jump host
 - ProxyCommand, 82
 - tips, 82

K

- Kerberos
 - Active Directory (AD), 67
 - user authentication, 67

L

- launching a Job Template
 - : API, 79
- LDAP, 58, 63
 - authentication, 58, 63
 - referrals, 62
- LDAP mapping, 63
 - authentication, 63
- LDAP referrals
 - troubleshooting, 62
- LDAP team mapping
 - authentication, 63
- license, 1, 2
 - features, 4
 - nodes, 3
 - trial, 3
 - types, 3
- license features, 1
- licenses
 - components, 4
 - DEB files, 4
 - installation bundle, 4
 - RPM files, 4
- live events
 - port changes, 75
 - troubleshooting, 75
- log, 65, 66
- logfiles, 28
- login
 - logstash, 29
- logging, 29
 - Elastic stack, 29
 - ELK stack, 29
 - loggly, 29
 - splunk, 29
 - sumologic, 29

- loggly
 - logging, 29
- login message
 - custom, 38
- login timeout, 65
- logo
 - custom, 38, 73
- logstash
 - login, 29

M

- management jobs, 9
 - cleanup activity stream, 9
 - cleanup fact details, 13
 - cleanup job history, 16
- modules, using unreleased
 - tips, 85

N

- notifications
 - hostname configuration, 83

O

- organization mapping, 46, 63
 - authentication, 46, 63

P

- pending playbook
 - troubleshooting, 76
- Pendo, 92
- PENDO_TRACKING_STATE, 92
- playbook setup
 - backup/restore arguments, 71
- playbooks are not viewable
 - Job Template drop-down list, 76
- playbooks not appearing
 - troubleshooting, 76
- plugins, callback
 - tips, 85
- port changes
 - live events, 75
- postface, 93
- Postgresql
 - redundancy, 21
- private IPs with dynamic inventory
 - tips, 84
- PRoot
 - troubleshooting, 76
- proxy support, 26
 - reverse proxy, 27
- ProxyCommand
 - jump host, 82
 - tips, 82

R

- RabbitMQ
 - redundancy, 21
- RADIUS Authentication Settings
 - authentication, 56
- rebranding, 73
- redundancy
 - Postgresql, 21
 - RabbitMQ, 21
 - setup considerations, 21
- referrals
 - LDAP, 62
- removing old data, 9
- restart Tower, 5
- restorations, 71
 - considerations, 72
 - playbooks, 71
- reverse proxy, 27
 - proxy support, 27
- RPM files
 - licenses, 4

S

- SAML Service Provider
 - authentication, 51
- scripts, admin utility, 5
- session limits, 70
 - AUTH_BASIC_ENABLED, 70
 - AUTH_TOKEN_PER_USER, 70
- session.py, 70
- social authentication, 35, 40
- splunk
 - logging, 29
- start Tower, 5
- stop Tower, 5
- sumologic
 - logging, 29
- super user creation
 - tower-manage, 81
- support, 1–3
- system
 - configuration, 37

T

- team mapping, 46, 63
 - authentication, 46, 63
- timeout login, 65
- tips, 79
 - admin creation, 81
 - admin password change, 81
 - Ansible modules, unreleased, 85
 - ansible.cfg, 82
 - ansible_variables, viewing all, 82

- callback plugins, 85
- command line interface, 79
- configuration file configuration, 82
- configuration file location, 82
- curl, 83
- dynamic inventory and instance filtering, 84
- dynamic inventory and private IPs, 84
- EC2 VPC instances, 84
- filtering instances, 84
- host/group vars import, 86
- instance filtering, 84
- inventory import, 86
- jump host, 82
- modules, using unreleased, 85
- plugins, callback, 85
- private IPs with dynamic inventory, 84
- ProxyCommand, 82
- Tower CLI, 79
- unreleased modules, 85
- Windows connection, 85
- winrm, 85
- tools
 - tower-cli, 87
- Tower admin utility script, 5
- Tower CLI
 - command line interface, 79
 - tips, 79
- tower-cli, 87
 - capabilities, 87
 - installation, 87
- tower-manage, 33
 - change password, 81
 - high availability management, 34
 - inventory import, 33
 - super user creation, 81
- tower-manage, data cleanup, 33
- trial, 3
- troubleshooting, 75
 - authentication timeout, 65
 - bubblewrap, 39, 77
 - EC2 VPC instances, 77
 - error logs, 75
 - general help, 75
 - host connections, 75
 - hosts list, 78
 - job cancellation, 76
 - job does not run, 76
 - LDAP referrals, 62
 - live events, 75
 - pending playbook, 76
 - playbooks not appearing, 76
 - PRoot, 76
 - websockets, 75

U

UI

- configuration, [38](#)

- unreleased modules

- tips, [85](#)

- updates, [3](#)

- usability data collection, [92](#)

- user authentication

- Kerberos, [67](#)

- user data tracking, [92](#)

V

- variables

- bubblewrap, [39](#), [77](#)

- virtual environment, [83](#)

- VPC instances

- EC2, [77](#)

W

- websockets

- troubleshooting, [75](#)

- Windows connection

- tips, [85](#)

- winrm

- tips, [85](#)